




Contents

* SDL1/SDLT1		9
* SDL2/SDLT2		11
* SDL3/SDLT3		13
* SDL4/SDLT4		15
* SDL5/SDLT5		17
* SDL8/SDLT8		19
* SDL10/SDLT10		21
* SDL12/SDLT12		23
* SDL15/SDLT15		25
* SDL16/SDLT16		27
* SDL20/SDLT20		29
* SDL32/SDLT32		31
* SDL45/SDLT45		33
* SDL64/SDLT64		35
* SDL90/SDLT90		37
* SDL120/SDLT120		39
* SDL150/SDLT150		41
* SDL200/SDLT200		43

Performance Range

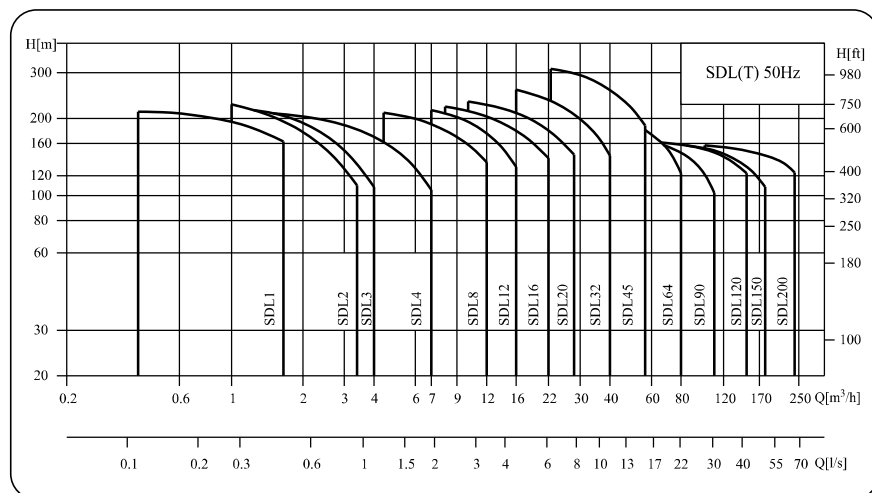


Specification

Key parameter	SDL1	SDL2	SDL3	SDL4	SDL8	SDL12	SDL16	SDL20
Rated Flow[m ³ /h]	1	2	3	4	8	12	16	20
Rated Flow[l/s]	0.28	0.56	0.83	1.1	2.2	3.3	4.4	5.6
Flow Range[m ³ /h]	0.4~1.8	1~3.5	1.2~4	1.5~7	5~12	7~16	8~22	10~28
Flow Range[l/s]	0.11~0.5	0.28~0.97	0.33~1.1	0.42~1.9	1.39~3.3	1.9~4.4	2.2~6.1	2.8~7.8
Max. Pressure[bar]	21	23	22	21	21	22	22	23
Motor Capacity[kW]	0.37~2.2	0.37~3	0.37~3	0.37~4	0.75~7.5	1.5~11	2.2~15	1.1~18.5
Temp. Range[°C]	-15~105							
Max. Efficiency[%]	44	46	54	58	62	63	66	69
ProductType								
SDL	✓	✓	✓	✓	✓	✓	✓	✓
SDLT	✓	✓	✓	✓	✓	✓	✓	✓
SDL Pipe Connection								
DIN Flange	DN25	DN25	DN25	DN32	DN40	DN50	DN50	DN50
Pipe Thread	R1 1 1/4"	R1 1 1/4"	R1 1 1/4"	R1 1 1/4"	R1 2"	R1 2"	R1 2"	R1 2"
Joint Connector	DN32	DN32	DN32	DN32	DN50	DN50	DN50	DN50
SDLT Pipe Connection								
DIN Flange	DN25	DN25	DN25	DN32	DN40	DN50	DN50	DN50


Key parameter	SDL32	SDL45	SDL64	SDL90	SDL120	SDL150	SDL200
Rated Flow[m ³ /h]	32	45	64	90	120	150	200
Rated Flow[l/s]	8.9	12.5	17.8	25	33.3	41.7	55.6
Flow Range[m ³ /h]	16~40	25~55	30~80	50~110	60~150	80~180	100~240
Flow Range[l/s]	4.4~11	6.9~15.3	8~22	14~30	17~42	22~50	28~67
Max. Pressure[bar]	26	30	22	17	16	16	16
Motor Capacity[kW]	1.5~30	3~45	4~45	5.5~45	11~75	11~75	18.5~110
Temp. Range[°C]	-15~105						
Max. Efficiency[%]	74	75	76	77	74	73	79
ProductType							
SDL	✓	✓	✓	✓	✓	✓	✓
SDLT	✓	✓	✓	✓	✓	✓	✓
Pipe Connection							
DIN Flange	DN65	DN80	DN100	DN100	DN125	DN125	DN150

Model Description


SDL,SDLT1/2/3/4/8/12/16/20

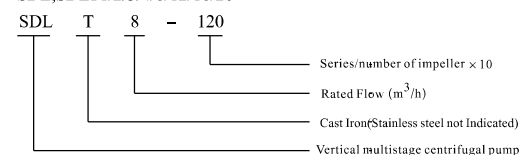

SDL,SDLT32/45/64/90/120/150

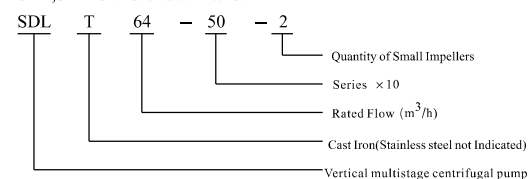

SDL,SDLT200

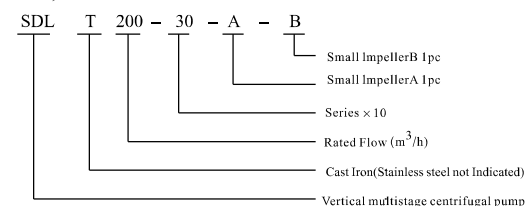

Typical Application

●SDL, SDLT pump is vertical multistage centrifugal pump, the pipeline structure can ensure that the pump can be directly installed in the pipeline system which pipe diameters are the same and the outlet and inlet at the same level. This design of structure makes the connection from Pump to pipe more compact.

●SDL (T) is a kind of multi-functional pump, can transfer not only water but also various industrial liquid medium, suitable for different temperature, flow rate and pressure range.

●SDLT suitable for non-corrosive liquids, SDL is suitable for mild corrosive liquid.

●Water supply: water filtering and conveying, water partition, net pressure boosting for high-rise buildings, hotels; industrial water pressure boosting.

●Industrial boosting: process water system, cleaning system, high-pressure washing system, fire-fighting system, car cleaning.

●Industrial liquid transportation: cooling and air conditioning system, boiler feed water system and temperature system, machine matching.

●Delivery: oil and alcohol, acid and alkali, ethylene glycol and coolant.

●Water treatment: UF, RO systems, distillation systems, separator, the swimming pool.

●Irrigation: Region irrigation, sprinkler irrigation, drip irrigation.

Motor

- Totally enclosed, air-cooled secondary standard motor
- Degree of protection: IP 55
- Insulation class: F
- Standard voltage: 50Hz: 1 × 220-230/240V
3 × 200-220/346-380V
3 × 220-240/380-415V
3 × 220-255/380-440V
- Other voltage of the motor is available on request.
- Single phase motors from 0.37W-2.2KW are available on request.

Single performance curve

- All measure value of curves are based on the motor in a constant speed of 2900 RPM and 2950 RPM.
- Curve tolerance meets ISO9906, appendix A.
- Test with 20°C pure water(not contain water), kinematic viscosity 1mm²/s.
- Pump using referring to the performance range of thick lines, to prevent the motor from too small flow to produce overheat and too big flow to produce overload.


Instruction

- SDL(T) is non self-priming vertical multistage pump and with standard motor, motor shaft and pump shaft are connected directly by coupling, and the fit the shell and flow passage components on the between the frame and Inlet & outlet seat by pull rod and nuts. The inlet and outlet are in the same level line at the bottom of the pump.

- Pump can be configured intelligent protector according the need, in order to protect pump from dry run, lack of phase, overload and so on.


Altitude and Ambient temperature

- When pump works in the condition ambient temperature > 40°C or altitude > 1000m, the output of motor P2 will be lower, the power of motor should be bigger.

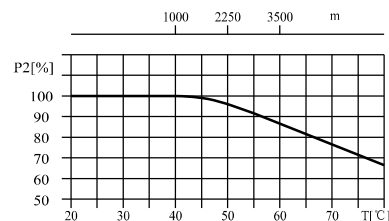

Max. Working pressure

- Below picture showing the limit of pressure and temperature, Pressure and temperature shall be in the range of showing.

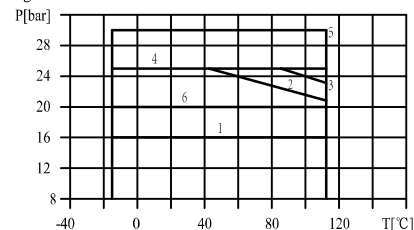


Model		Curve No.
SDL,SDLT1/2/3/4		2
SDL,SDLT8/12/16/20		3
SDL,SDLT32	32-10-1~32-70	1
	32-80-2~32-120	4
	32-130-2~32-160	5
SDL,SDLT45	45-10-1~45-60	1
	45-70-2~45-90	4
	45-100-2~45-130-2	5
SDL,SDLT64	64-10-1~64-50	1
	64-60-2~64-80-1	4
SDL,SDLT90	90-10-1~90-50-2	1
	90-50~90-60	4
SDL,SDLT120/150/200		6

Note: the curve 4/5 need to customize

Working Condition

- Thin, clean, non-flammable and explosive and not containing solid particles or fibers liquid.
- Liquid Temperature: room temperature 15 °C, + 70 °C
Hot Water: -15 °C--+105 °C
- Environment Temperature: Max. 40 °C
- Altitude: Max. 1000m


Structure chart:SDL,SDLT1、2、3、4

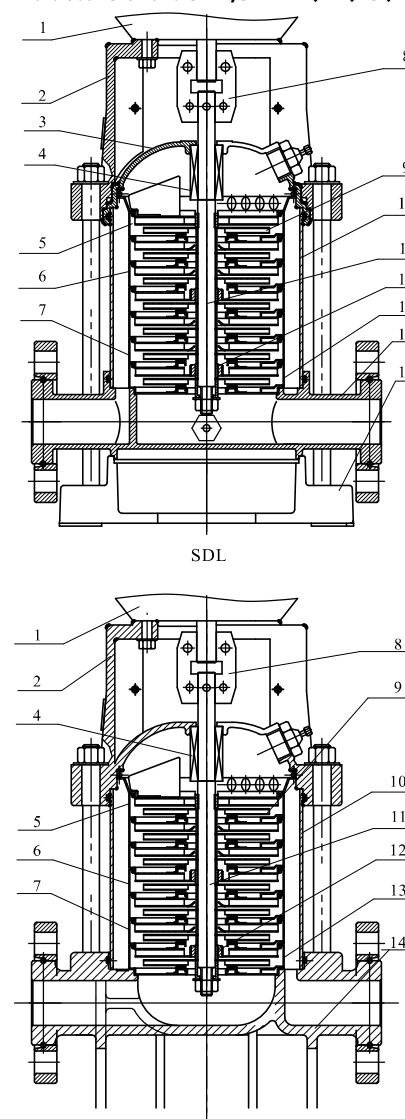


Material :SDL,SDLT 1、2、3、4

No	Description	Material	AISI/ASTM
1	Motor	Assembling unit	
2	Support	Cast Iron/ Ductile iron	ASTM25B ASTM70-50-05
4	Mechanical seal	Assembling unit	
5	Outlet guide vane	Stainless Steel	AISI304
6	Guide vane	Stainless Steel	AISI304
7	Support guide vane	Stainless Steel	AISI304
8	Coupling	Ductile iron	ASTM70-50-05
9	Impeller	Stainless Steel	AISI304
10	Shell	Stainless Steel	AISI304
11	Pump Shaft	Stainless Steel	AISI304 AISI316L
12	Bearing	Tungsten Carbide	
13	Inlet guide vane	Stainless Steel	AISI304
SDL			
3	seal seat	Stainless Steel	AISI304
14	Inlet & outlet seat	Stainless Steel	AISI304
15	Seat	Cast Iron	ASTM25B
SDLT			
14	Inlet & outlet seat	Cast Iron	ASTM25B

structure chart:SDL,SDLT 8、12、16、20 Material :SDL,SDLT 8、12、16、20

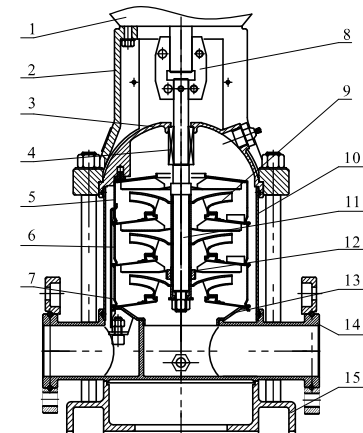


SDL

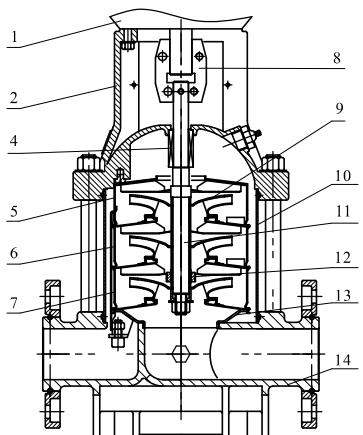


SDLT

No	Description	Material	AISI/ASTM
1	Motor	Assembling unit	
2	Support	Cast Iron/ Ductile iron	ASTM25B ASTM70-50-05
4	Mechanical seal	Assembling unit	
5	Outlet guide vane	Stainless Steel	AISI304
6	Guide vane	Stainless Steel	AISI304
7	Support guide vane	Stainless Steel	AISI304
8	Coupling	Ductile iron	ASTM70-50-05
9	Impeller	Stainless Steel	AISI304
10	Shell	Stainless Steel	AISI304
11	Pump Shaft	Stainless Steel	AISI304 AISI316L
12	Bearing	Tungsten Carbide	
13	Inlet guide vane	Stainless Steel	AISI304
SDL			
3	seal seat	Stainless Steel	AISI304
14	Inlet & outlet seat	Stainless Steel	AISI304
15	Seat	Cast Iron	ASTM25B
SDLT			
14	Inlet & outlet seat	Cast Iron	ASTM25B

structure chart:SDL,SDLT32、45、64、90 Material :SDL,SDLT32、45、64、90

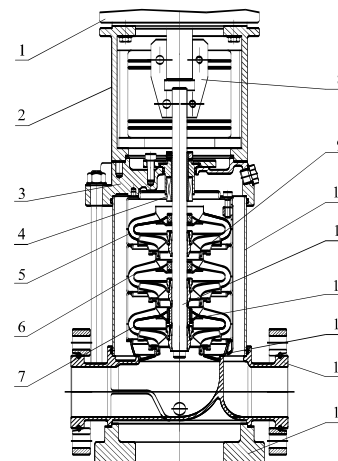


SDL

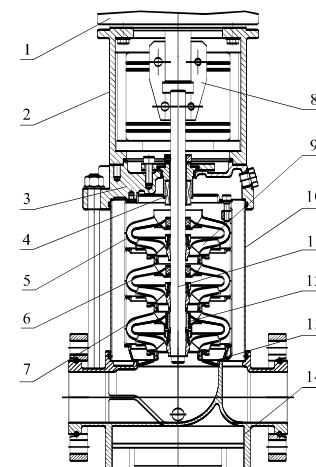


SDLT

No	Description	Material	AISI/ASTM
1	Motor	Assembling unit	
2	Support	Cast Iron/ Ductile iron	ASTM25B
4	Mechanical seal	Assembling unit	
5	Outlet guide vane	Stainless Steel	AISI304
6	Guide vane	Stainless Steel	AISI304
7	Support guide vane	Stainless Steel	AISI304
8	Coupling	Ductile iron	ASTM70-50-05
9	Impeller	Stainless Steel	AISI304
10	Shell	Stainless Steel	AISI304
11	Pump Shaft	Stainless Steel	AISI304 AISI316L AISI431
12	Bearing	Tungsten Carbide	
13	Inlet guide vane	Stainless Steel	AISI304
SDL			
3	seal seat	Stainless Steel	AISI304
14	Inlet & outlet seat	Stainless Steel	AISI304
15	Seat	Cast Iron	ASTM25B
SDLT			
3	seal seat	Cast Iron/ Ductile iron	ASTM25B ASTM70-50-05
14	Inlet & outlet seat	Cast Iron/ Ductile iron	ASTM25B ASTM70-50-05

structure chart:SDL,SDLT120、150、200 Material :SDL,SDLT120、150、200

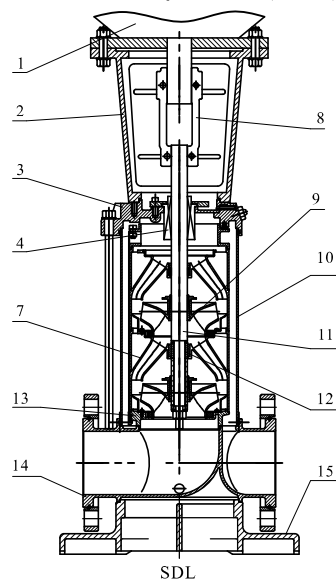

SDL

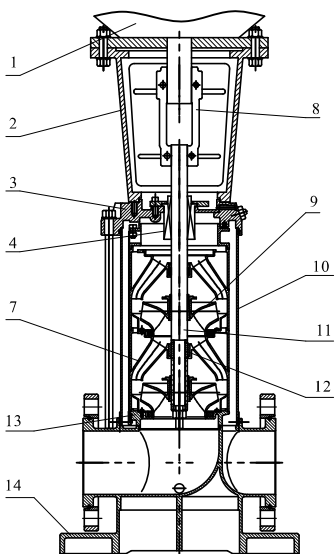

SDLT

No	Description	Material	AISI/ASTM
1	Motor	Assembling unit	
2	Frame	Cast Iron/Ductile iron	ASTM25B ASTM70-50-05
4	Seal	Assembling unit	
7	Support guide vane	Stainless Steel	AISI304
8	Coupling	Ductile iron	ASTM7-50-05
9	Impeller	Stainless Steel	AISI304
10	Shell	Stainless Steel	AISI304
11	Pump Shaft	Stainless Steel	AISI304 AISI316L AISI431
12	Bearing	Tungsten Carbide	
13	Inlet guide vane	Stainless Steel	AISI304
SDL			
3	seal seat	Stainless Steel	AISI304
14	Inlet & outlet seat	Stainless Steel	AISI304
15	Seat	Ductile iron	ASTM70-50-05
SDLT			
3	seal seat	Ductile iron	ASTM70-50-05
14	Inlet & outlet seat	Cast Iron/Ductile iron	ASTM25B ASTM7-50-05

Min. Inlet Pressure NPSH

If pump pressure is lower than the transferring vapour pressure, cavitation can occur. Make sure there is a minimum vapour pressure at the pump suction side, the maximum suction H [m] can be calculated by the following formula:

$$H = P_b \times 10.2 - NPSH - H_f - H_v$$

P_b = Atmospheric pressure
(Atmospheric pressure can be set to 1 bar)

For the closed system, P_b is system pressure.

$NPSH$ = net positive suction head [m]
(Can read from the Max. flow range of the curve)


H_f = Entrance Line loss [m]

H_v = vapour pressure [m]


H_s = Safety margin = minimum 0.5 m head

Calculated H is positive, the pump can be run in the condition of Max. suction.



Calculated H is negative, There must be a minimum inlet pressure of water head

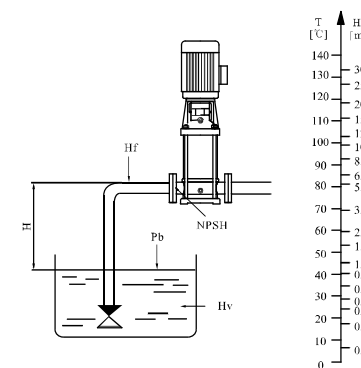


Check to ensure that the pump will be not in cavitation.

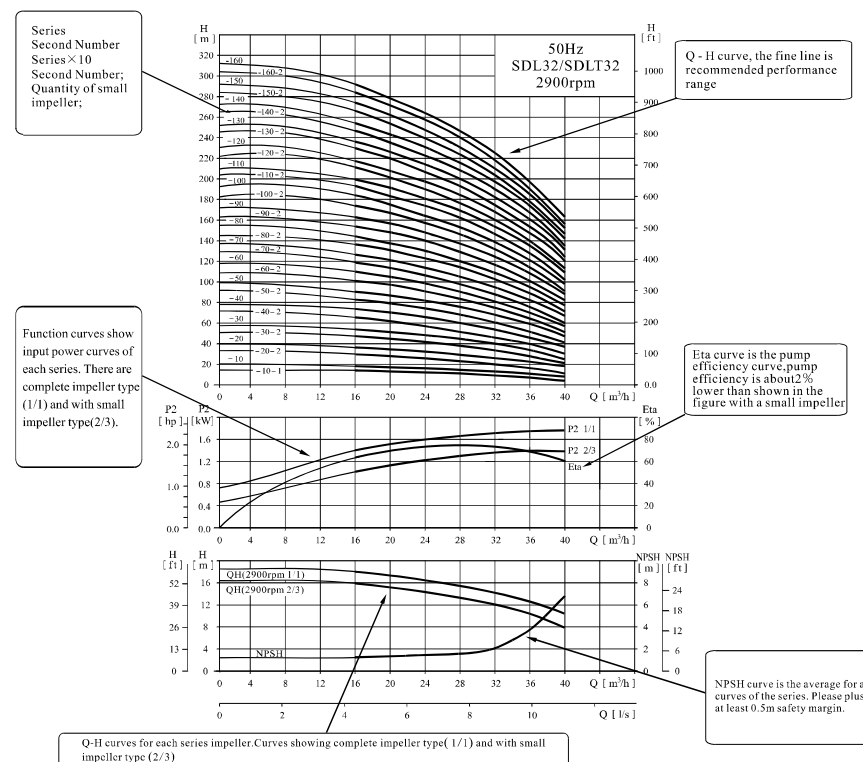

Performance Curves

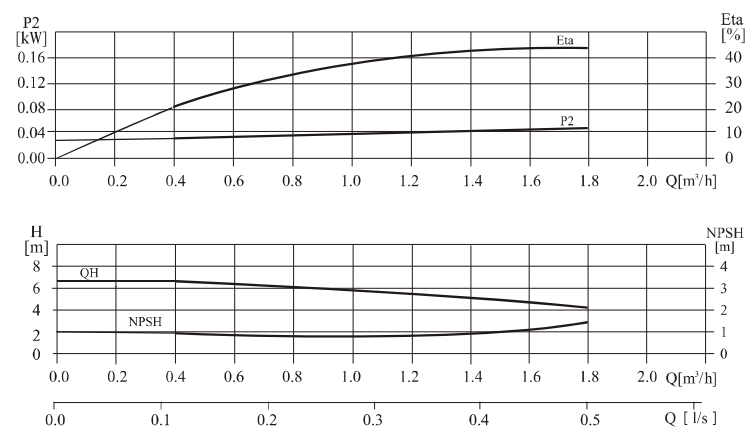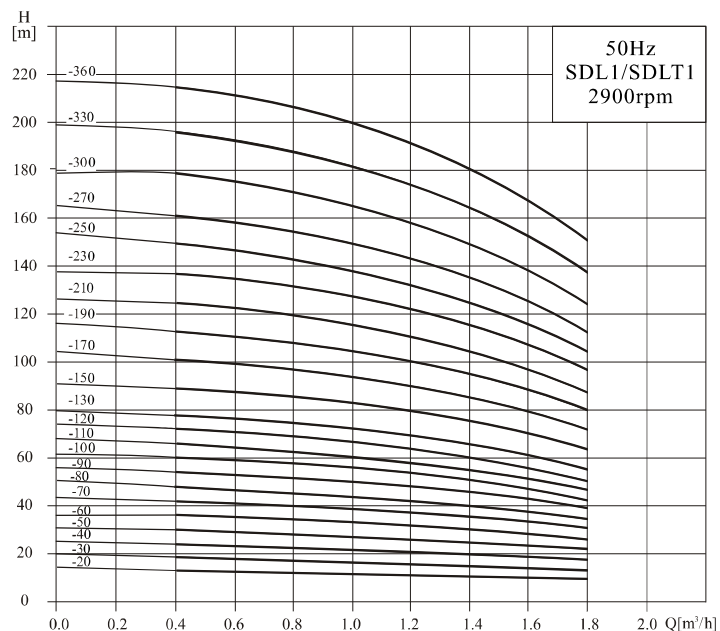

Installation drawing

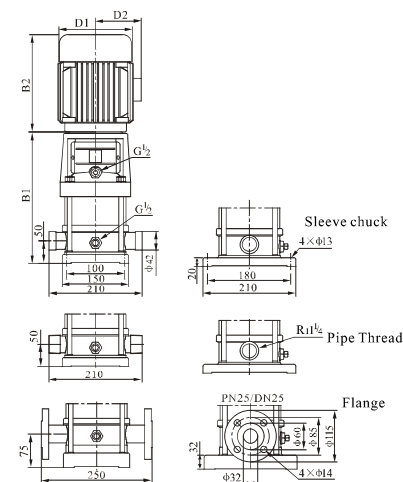

Size & Weight


Model	Size (mm)					Weight(kg)
	B1	B2	B1+B2	D1	D2	
SDL1-20	258	225	483	148	117	20
SDL1-30	276	225	501	148	117	20
SDL1-40	294	225	519	148	117	21
SDL1-50	312	225	537	148	117	21
SDL1-60	330	225	555	148	117	22
SDL1-70	348	225	573	148	117	23
SDL1-80	366	225	591	148	117	24
SDL1-90	384	225	609	148	117	25
SDL1-100	402	225	627	148	117	26
SDL1-110	420	225	645	148	117	26
SDL1-120	448	245	693	170	142	29
SDL1-130	466	245	711	170	142	30
SDL1-150	502	245	747	170	142	31
SDL1-170	538	245	783	170	142	33
SDL1-190	574	245	819	170	142	34
SDL1-210	610	245	855	170	142	35
SDL1-230	646	245	891	170	142	36
SDL1-250	692	290	982	190	155	42
SDL1-270	728	290	1018	190	155	43
SDL1-300	782	290	1072	190	155	45
SDL1-330	836	290	1126	190	155	49
SDL1-360	890	290	1180	190	155	51

Performance table


Model	Associated motor(kW)	Q (m³/h)	0.4	0.6	0.8	1.0	1.2	1.4	1.6	1.8
SDL1-20	0.37	H (m)	13	12.5	12	11.5	11	10.5	10	9.5
SDL1-30	0.37		19	18	17.5	17	16.5	16	15	14
SDL1-40	0.37		24	23.5	23	22.5	21.5	21	19	18
SDL1-50	0.37		30	29.6	29	28	27	26	24	22
SDL1-60	0.37		36	35.5	35	33.5	33	31	28	26
SDL1-70	0.37		42	41	40.5	39	38	36	33	30
SDL1-80	0.55		48	47	46	45	43	41	38	34
SDL1-90	0.55		54	53	52	51	49	46	43	39
SDL1-100	0.55		60	59	58	57	54	51	48	43
SDL1-110	0.55		66	65	63	61	59	56	52	47
SDL1-120	0.75		72	71	69	67	64	61	57	51
SDL1-130	0.75		78	77	75	73	69	66	62	55
SDL1-150	0.75		89	88	86	84	79	76	71	63
SDL1-170	1.1		101	99	97	95	89	86	80	71
SDL1-190	1.1		113	110	108	106	99	96	89	79
SDL1-210	1.1		124	122	120	117	110	106	98	87
SDL1-230	1.1		137	133	131	128	121	116	107	96
SDL1-250	1.5		149	145	143	139	131	126	116	104
SDL1-270	1.5		161	157	155	150	141	136	125	112
SDL1-300	1.5		178	175	171	166	157	150	139	124
SDL1-330	2.2		196	192	188	183	173	165	154	137
SDL1-360	2.2		214	210	205	200	190	181	169	151

Size and appearance of Single phase motors, explosion-proof motor are different, please contact our company.

Performance Curves

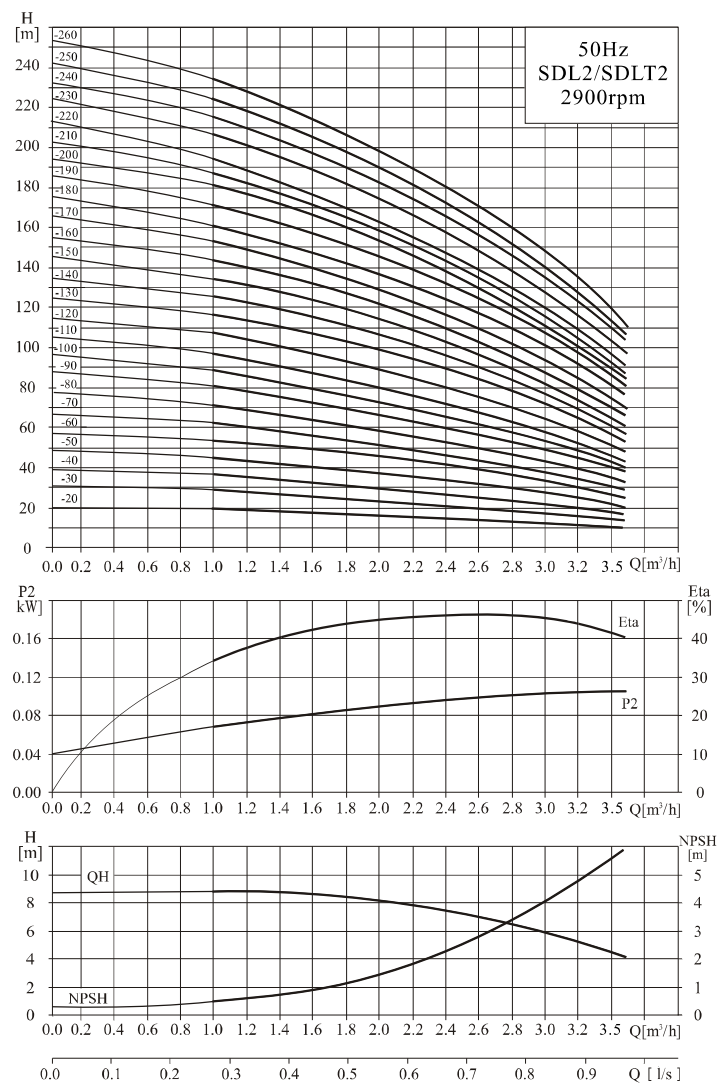

Installation drawing

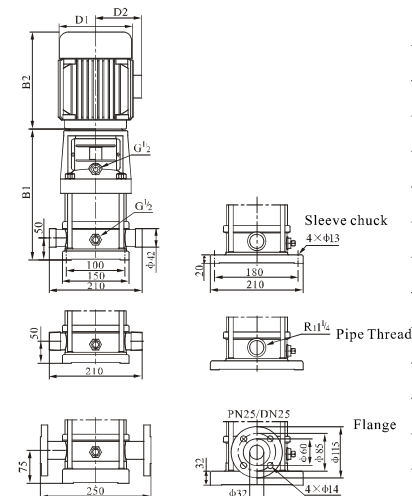

Size & Weight




Model	Size (mm)				Weight(kg)
	B1	B2	B1+B2	D1	
SDL2-20	258	225	483	148	20
SDL2-30	276	225	501	148	20
SDL2-40	294	225	519	148	22
SDL2-50	312	225	537	148	23
SDL2-60	340	245	585	170	26
SDL2-70	358	245	603	170	26
SDL2-90	394	245	639	170	28
SDL2-110	430	245	675	170	29
SDL2-130	476	290	766	190	35
SDL2-150	512	290	802	190	36
SDL2-180	566	290	856	190	41
SDL2-220	638	290	928	190	42
SDL2-260	720	345	1065	197	52

Performance table


Model	Associated motor(kW)	Q (m³/h)	1	1.2	1.6	2.0	2.4	2.8	3.2	3.5
SDL2-20	0.37	H (m)	18	17	16	15	13	12	10	8
SDL2-30	0.37		27	26	24	22	20	18	15	12
SDL2-40	0.55		36	35	33	30	26	24	20	16
SDL2-50	0.55		45	43	40	37	33	30	24	20
SDL2-60	0.75		53	52	50	45	40	36	30	24
SDL2-70	0.75		63	61	57	52	47	41	35	28
SDL2-90	1.1		80	78	73	67	61	54	45	37
SDL2-110	1.1		98	95	89	82	73	64	54	44
SDL2-130	1.5		116	114	106	98	89	78	65	52
SDL2-150	1.5		134	130	123	112	100	90	73	60
SDL2-180	2.2		161	157	148	136	121	108	91	76
SDL2-220	2.2		197	192	180	165	148	130	110	90
SDL2-260	3.0		232	228	214	198	179	158	130	110

Size and appearance of Single phase motors, explosion-proof motor are different, please contact our company.

Performance Curves

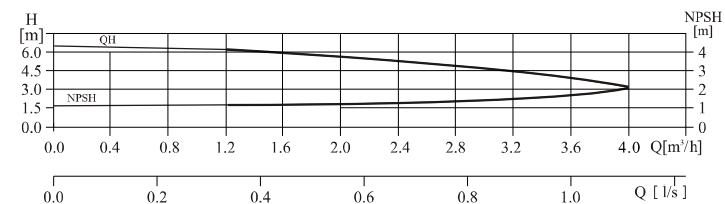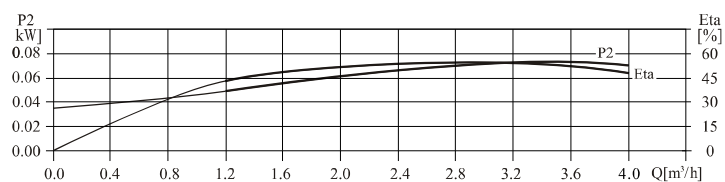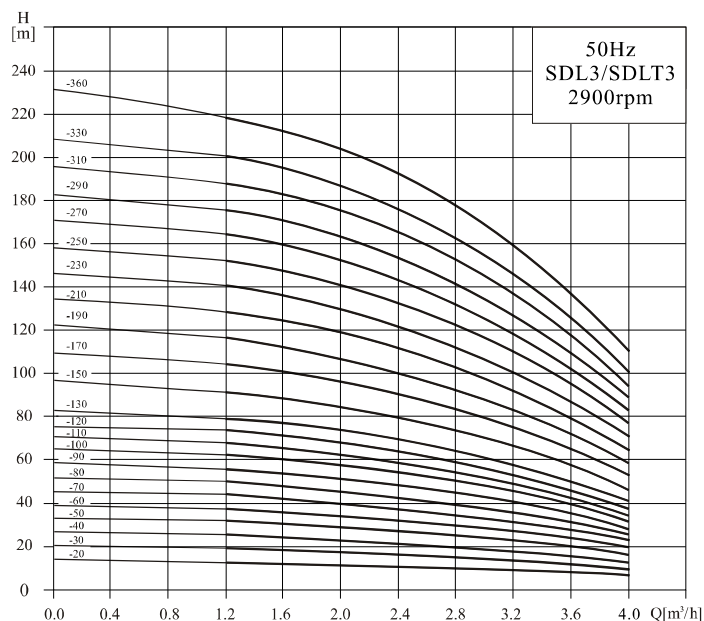

Installation drawing

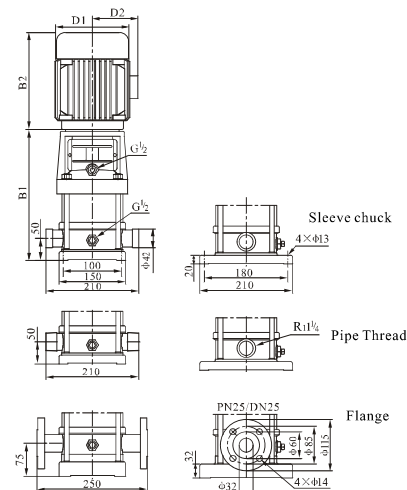

Size & Weight




Model	Size (mm)					Weight(kg)
	B1	B2	B1+B2	D1	D2	
SDL3-20	258	225	483	148	117	20
SDL3-30	276	225	501	148	117	20
SDL3-40	294	225	519	148	117	21
SDL3-50	312	225	537	148	117	21
SDL3-60	330	225	555	148	117	23
SDL3-70	348	225	573	148	117	24
SDL3-80	376	245	621	170	142	27
SDL3-90	394	245	639	170	142	28
SDL3-100	412	245	657	170	142	28
SDL3-110	430	245	675	170	142	29
SDL3-120	448	245	693	170	142	30
SDL3-130	466	245	711	170	142	31
SDL3-150	502	245	747	170	142	32
SDL3-170	548	290	838	190	155	38
SDL3-190	584	290	874	190	155	39
SDL3-210	620	290	910	190	155	42
SDL3-230	656	290	946	190	155	43
SDL3-250	692	290	982	190	155	44
SDL3-270	728	290	1018	190	155	45
SDL3-290	764	290	1054	190	155	46
SDL3-310	810	345	1155	197	165	54
SDL3-330	846	345	1191	197	165	55
SDL3-360	900	345	1245	197	165	57

Performance table


Model	Associated motor(kW)	Q (m³/h)	1.2	1.6	2.0	2.4	2.8	3.0	3.2	3.6	4.0
SDL3-20	0.37	H (m)	12.5	11.5	11	10.5	10	9	8	7	6
SDL3-30	0.37		19	18.5	17.5	16.5	15	14	13	11	9
SDL3-40	0.37		25	24	23	21.5	20	19	18	15	12
SDL3-50	0.37		31	30	29	27	25	23	22	19	16
SDL3-60	0.55		36	35	34	32	30	28	27	23	19
SDL3-70	0.55		43	41	39	37	34	32	31	27	22
SDL3-80	0.75		49	47	45	43	39	37	35	31	25
SDL3-90	0.75		55	53	51	48	45	42	40	35	28
SDL3-100	0.75		61	59	57	54	50	47	45	39	31
SDL3-110	1.1		67	64	61	58	54	51	49	42	34
SDL3-120	1.1		73	70	67	63	58	55	52	45	37
SDL3-130	1.1		78	76	73	69	64	60	57	49	40
SDL3-150	1.1		90	88	84	79	73	69	66	57	46
SDL3-170	1.5		103	100	96	90	83	79	75	64	52
SDL3-190	1.5		115	112	107	100	92	88	83	72	58
SDL3-210	2.2		128	124	119	112	102	98	91	79	64
SDL3-230	2.2		140	135	130	122	112	107	100	86	70
SDL3-250	2.2	H (m)	151	147	141	131	122	116	109	94	76
SDL3-270	2.2		164	159	152	143	132	124	117	101	82
SDL3-290	2.2		175	170	163	153	142	133	126	109	88
SDL3-310	3.0		187	182	175	165	153	142	135	116	94
SDL3-330	3.0		199	194	187	176	163	151	145	125	100
SDL3-360	3.0		218	212	204	192	178	168	159	137	109

Size and appearance of Single phase motors, explosion-proof motor are different, please contact our company.

Performance Curves

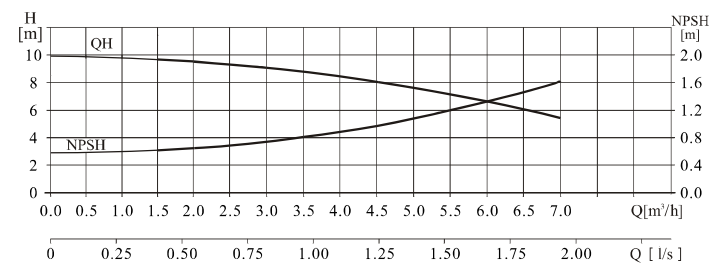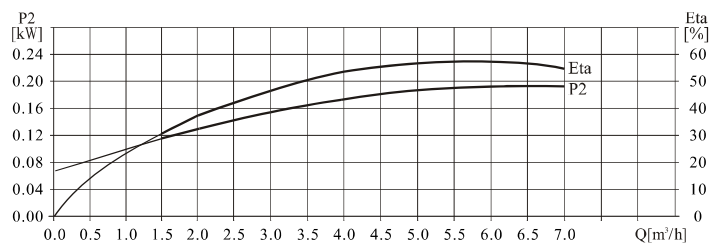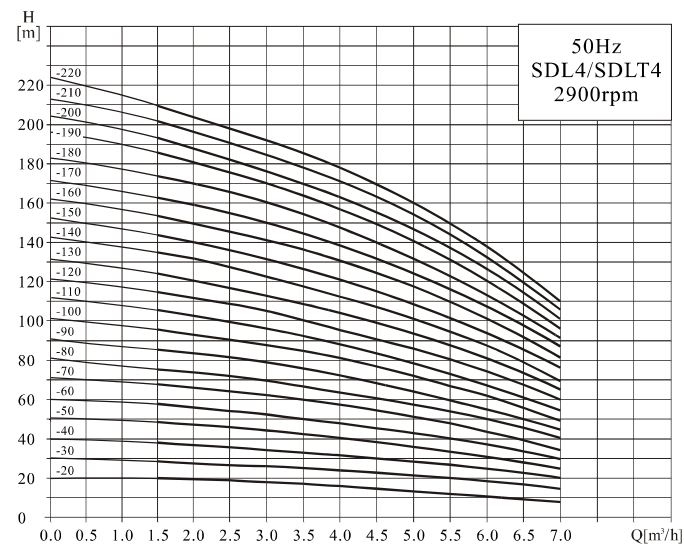

Installation drawing

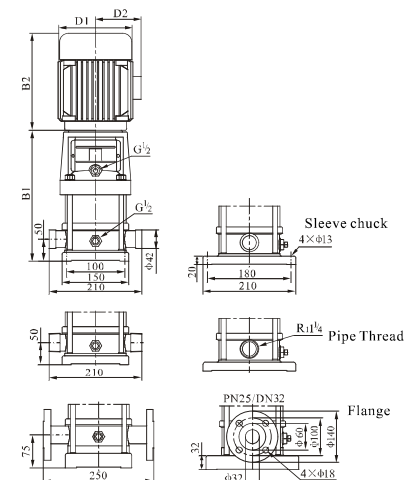

Size & Weight




Model	Size (mm)					Weight(kg)
	B1	B2	B1+B2	D1	D2	
SDL4-20	276	225	501	148	117	21
SDL4-30	303	225	528	148	117	22
SDL4-40	340	245	585	170	142	25
SDL4-50	367	245	612	170	142	27
SDL4-60	394	245	639	170	142	27
SDL4-70	431	290	721	190	155	33
SDL4-80	458	290	748	190	155	33
SDL4-100	512	290	802	190	155	37
SDL4-120	566	290	856	190	155	38
SDL4-140	630	345	975	197	165	46
SDL4-160	684	345	1029	197	165	48
SDL4-190	765	355	1120	230	188	57
SDL4-220	846	355	1201	230	188	59

Performance table


Model	Associated motor(kW)	Q (m³/h)	1.5	2.0	3.0	4.0	5.0	6.0	7.0
SDL4-20	0.37	H (m)	19	18	17	15	13	10	8
SDL4-30	0.55		28	27	26	24	20	18	13
SDL4-40	0.75		38	36	34	32	27	24	19
SDL4-50	1.1		47	45	43	40	34	31	23
SDL4-60	1.1		56	54	52	48	41	37	28
SDL4-70	1.5		66	63	61	56	48	43	33
SDL4-80	1.5		74	72	70	64	55	50	38
SDL4-100	2.2		96	90	87	81	71	62	48
SDL4-120	2.2		114	108	104	95	85	75	58
SDL4-140	3.0		136	126	122	112	101	89	68
SDL4-160	3.0		152	144	140	129	115	101	78
SDL4-190	4.0		183	171	168	153	137	122	93
SDL4-220	4.0		211	200	192	178	160	138	108

Size and appearance of Single phase motors, explosion-proof motor are different, please contact our company.

Performance Curves

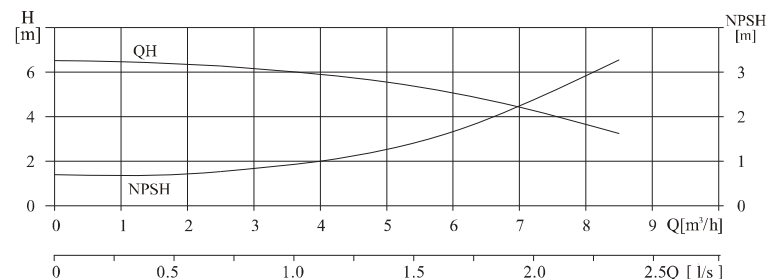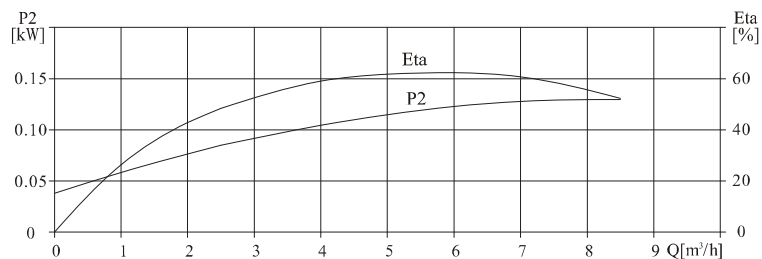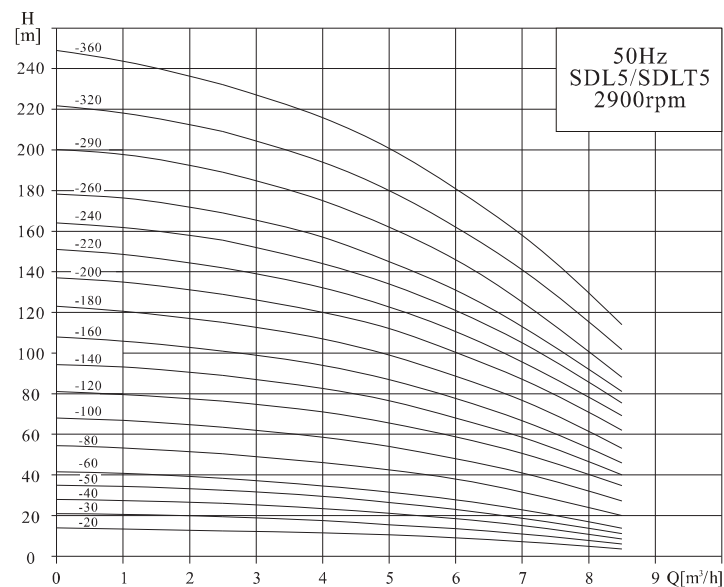

Installation drawing

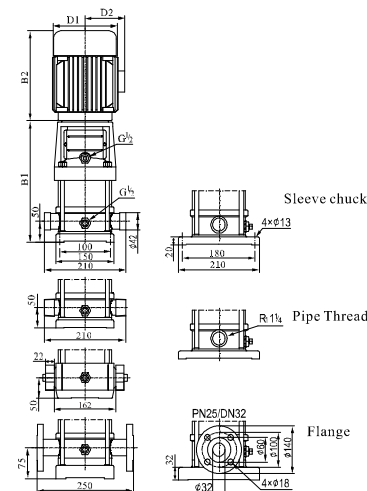

Size & Weight


Model	Size (mm)					Weight (kg)
	B1	B2	B1+B2	D1	D2	
SDL5-20	276	239	515	148	117	21
SDL5-30	303	239	541	148	117	22
SDL5-40	330	239	569	148	117	23
SDL5-50	367	280	647	170	142	25
SDL5-60	394	280	674	170	142	26
SDL5-80	448	280	728	170	142	27
SDL5-100	512	333	845	190	155	33
SDL5-120	566	333	899	190	155	37
SDL5-140	620	333	953	190	155	38
SDL5-160	674	333	1007	190	155	39
SDL5-180	738	348	1086	197	165	48
SDL5-200	792	348	1140	197	165	49
SDL5-220	846	382	1228	230	185	57
SDL5-240	900	382	1282	230	185	58
SDL5-260	954	382	1336	230	185	59
SDL5-290	1035	382	1417	230	185	60
SDL5-320	1136	435	1571	260	210	75
SDL5-360	1244	435	1679	260	210	76

Performance table


Model	Associated motor(kW)	Q (m³/h)	2.5	4	5	6	7	8.5
SDL5-20	0.37	H (m)	12.5	11.5	10.5	9	7	3.5
SDL5-30	0.55		19.5	17.5	15.5	13.5	11	6
SDL5-40	0.55		26	23.5	21	18.5	15	8.5
SDL5-50	0.75		32.5	29.5	26.5	23	18.5	11
SDL5-60	1.1		38.5	34.5	31.5	28	23	14
SDL5-80	1.1		50.5	46	42.5	38	31.5	20
SDL5-100	1.5		63.5	58.5	54	48	41	27.5
SDL5-120	2.2		76	71	65.5	58.5	50.5	35
SDL5-140	2.2		89	82	76.5	68	58.5	40
SDL5-160	2.2		101	94	87	77.5	66.5	46
SDL5-180	3.0		115	107	99	88.5	77	53
SDL5-200	3.0		129	120	112	100	87	62
SDL5-220	4.0		142	132	123	111	96	69
SDL5-240	4.0		156	144	134	121	105	75.5
SDL5-260	4.0		169	157	145	131	113	81
SDL5-290	4.0		189	175	162	146	125	88
SDL5-320	5.5		209	194	180	162	141	102
SDL5-360	5.5		232	216	201	181	158	114

Size and appearance of Single phase motors, explosion-proof motor are different, please contact our company.

Performance Curves

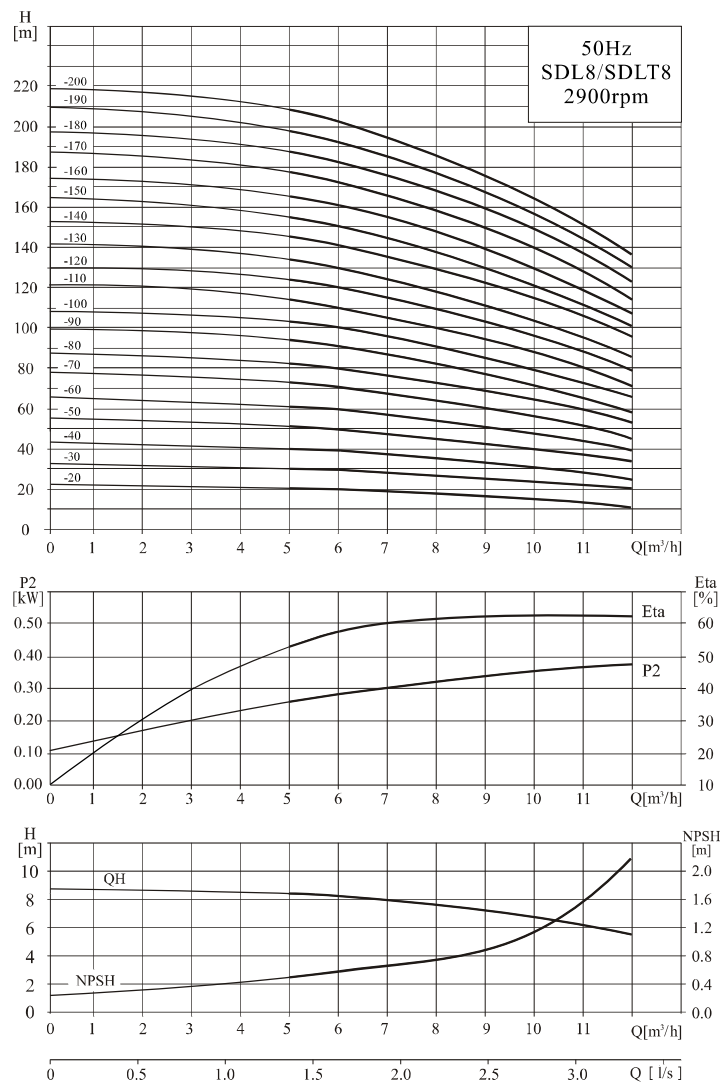

Installation drawing

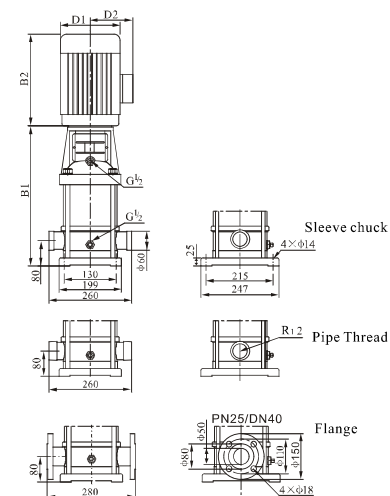

Size & Weight




Model	Size (mm)					Weight(kg)
	B1	B2	B1+B2	D1	D2	
SDL8-20	347	245	592	170	142	32
SDL8-30	377	245	622	170	142	34
SDL8-40	417	290	707	190	155	40
SDL8-50	447	290	737	190	155	44
SDL8-60	477	290	767	190	155	45
SDL8-80	547	345	892	197	165	53
SDL8-100	607	355	962	230	188	64
SDL8-120	667	355	1022	230	188	66
SDL8-140	747	390	1137	260	208	81
SDL8-160	807	390	1197	260	208	84
SDL8-180	867	390	1257	260	208	93
SDL8-200	927	390	1317	260	208	94

Performance table


Model	Associated motor(kW)	Q (m³/h)	5	6	7	8	9	10	11	12
SDL8-20	0.75	H (m)	20	19.5	19	18	17	16	14	13
SDL8-30	1.1		30	29.5	28.5	27	25	24	21	19
SDL8-40	1.5		41	39.5	38	36	34	32	28	26
SDL8-50	2.2		52	50	48	45	42	40	36	32
SDL8-60	2.2		62	60	57	54	51	48	43	39
SDL8-80	3.0		83	80	77	73	69	65	58	52
SDL8-100	4.0		104	100	97	92	87	81	73	65
SDL8-120	4.0		124	120	116	111	104	92	87	78
SDL8-140	5.5		145	141	136	130	122	113	102	92
SDL8-160	5.5		166	161	156	148	139	130	118	106
SDL8-180	7.5		187	182	175	167	157	146	134	120
SDL8-200	7.5		208	202	195	186	175	163	150	135

Size and appearance of Single phase motors, explosion-proof motor are different, please contact our company.

Performance Curves

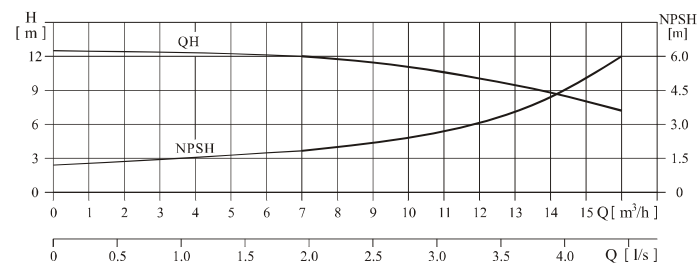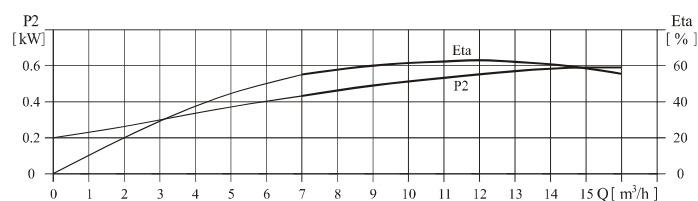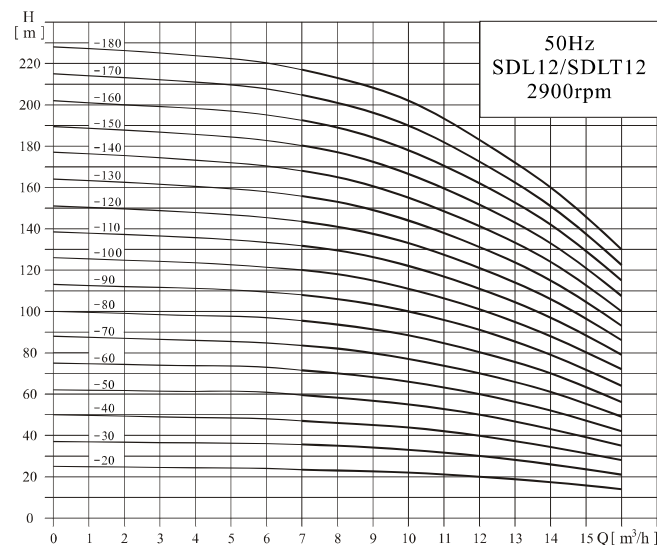

Installation drawing

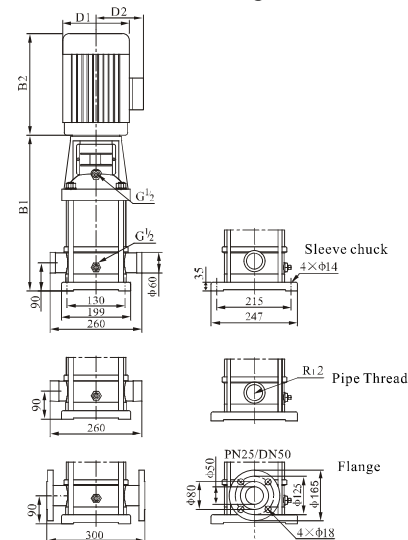

Size & Weight




Model	Size (mm)					Weight(kg)
	B1	B2	B1+B2	D1	D2	
SDL12-20	367	290	657	190	155	39
SDL12-30	397	290	687	190	155	43
SDL12-40	437	345	782	197	165	51
SDL12-50	467	345	812	197	165	53
SDL12-60	497	355	852	230	188	61
SDL12-70	547	390	937	260	208	73
SDL12-80	577	390	967	260	208	74
SDL12-90	607	390	997	260	208	76
SDL12-100	637	390	1027	260	208	83
SDL12-120	697	390	1087	260	208	87
SDL12-140	757	390	1147	260	208	108
SDL12-160	905	500	1405	330	255	161
SDL12-180	965	500	1465	330	255	164

Performance table


Model	Associated motor(kW)	Q (m³/h)	7	8	9	10	11	12	13	14	15	16
SDL12-20	1.5	H (m)	23.5	23	22.5	22	21	20	18.5	17	15.5	14
SDL12-30	2.2		35.5	35	34	33	31.5	30	28	26	23.5	21
SDL12-40	3		47	46	45	44	42	40	37	34	31	28
SDL12-50	3		59.5	58	56.5	55	52.5	50	46.5	43	39	35
SDL12-60	4		71.5	70	68	66	63	60	56	52	47	42
SDL12-70	5.5		83.5	82	79.5	77	73.5	70	65.5	61	55	49
SDL12-80	5.5		95.5	94	91	88	84	80	75	70	63	56
SDL12-90	5.5		108	106	103	100	95.5	91	85	79	71.5	64
SDL12-100	7.5		120	118	114.5	111	106	101	94.5	88	80	72
SDL12-120	7.5		143.5	141	137	133	127	121	113.5	106	96	86
SDL12-140	11		168	165	160	155	148	141	132.5	124	112	100
SDL12-160	11		192.5	189	183.5	178	170	162	152	142	128.5	115
SDL12-180	11		217	213	207.5	202	192.5	183	171.5	160	145	130

Size and appearance of Single phase motors, explosion-proof motor are different, please contact our company.

Performance Curves

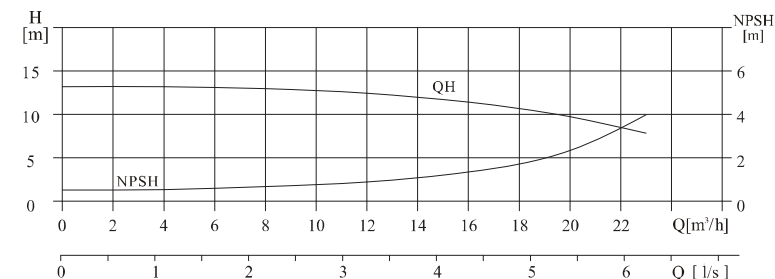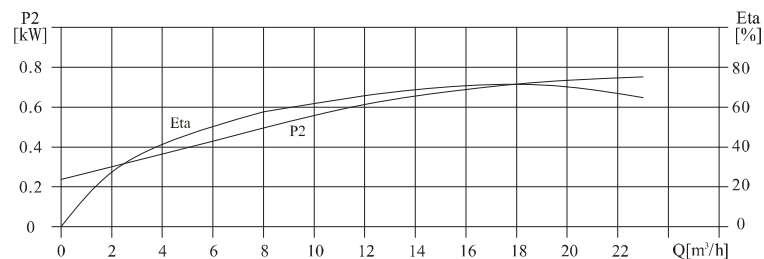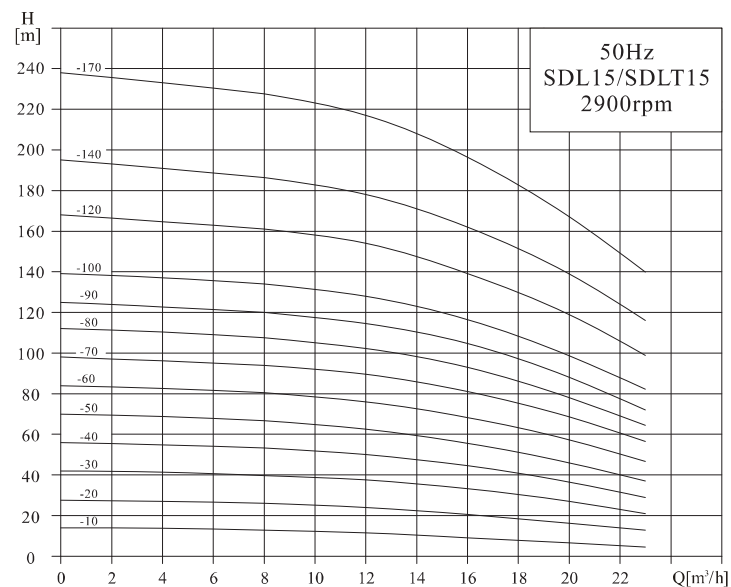

Installation drawing

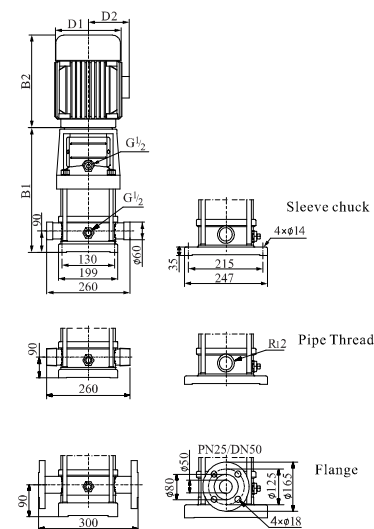

Size & Weight




Model	Size (mm)					Weight (kg)
	B1	B2	B1+B2	D1	D2	
SDL15-10	352	280	632	170	142	33
SDL15-20	397	333	730	190	155	42
SDL15-30	452	348	800	197	165	50
SDL15-40	497	382	879	230	185	59
SDL15-50	542	382	924	230	185	60
SDL15-60	607	435	1042	260	210	77
SDL15-70	652	435	1087	260	210	78
SDL15-80	697	435	1132	260	210	86
SDL15-90	742	435	1177	260	210	87
SDL15-100	875	580	1455	350	260	160
SDL15-120	965	580	1545	350	260	161
SDL15-140	1055	580	1635	350	260	162
SDL15-170	1190	580	1770	350	260	179

Performance table


Model	Associated motor(kW)	Q (m³/h)	8	10	12	14	15	16	18	20	23
SDL15-10	1.1	H (m)	13	12	11.5	10.5	10	9	7.5	6	4.5
SDL15-20	2.2		26	25	24	23	22	20.5	18	16	13
SDL15-30	3.0		39.5	38.5	37.5	35.5	34.5	33.5	30.5	27	21
SDL15-40	4.0		53	51.5	50	47.5	46	44.5	41	36.5	29
SDL15-50	4.0		67	64.5	62.5	60	58	55.5	52	46	37
SDL15-60	5.5		80.5	78	76	73	70.5	68	63.5	57	46.5
SDL15-70	5.5		94	92	89.5	86	83.5	81	75.5	68.5	56.5
SDL15-80	7.5		107.5	106	102.5	98.5	96	93	86.5	78	64.5
SDL15-90	7.5		120	118	114.5	110	107	105	97	88	72
SDL15-100	11		134	132	128	123	120	116.5	108.5	98.5	82.5
SDL15-120	11		161	158	154	148	144	139	130	119	99
SDL15-140	11		186	183	178	172	167	162	152	139	116
SDL15-170	15		227	224	217	210	203	196	185	167	140

Size and appearance of Single phase motors, explosion-proof motor are different

Performance Curves

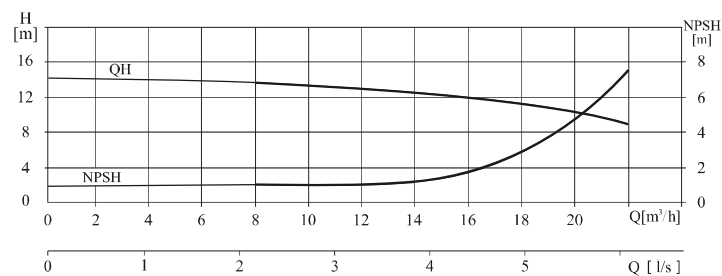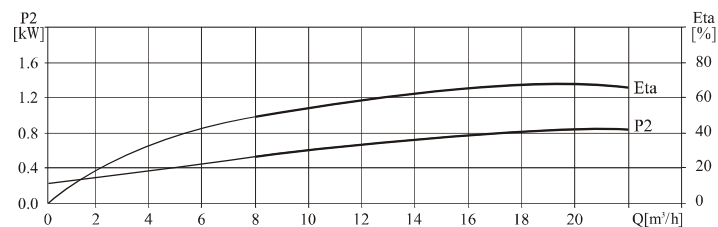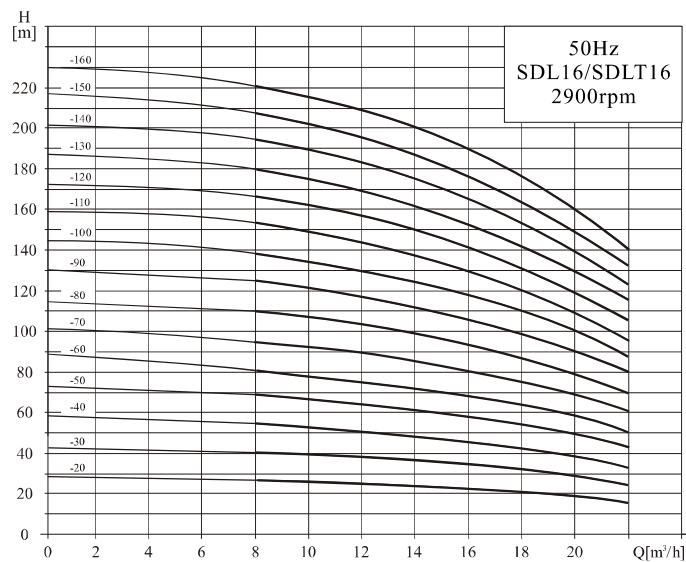

Installation drawing

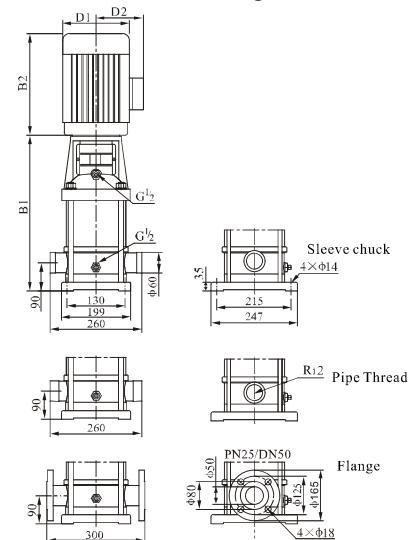

Size & Weight


Model	Size (mm)					Weight (kg)
	B1	B2	B1+B2	D1	D2	
SDL16-20	397	290	687	190	155	42
SDL16-30	452	345	797	197	165	50
SDL16-40	497	355	852	230	188	59
SDL16-50	562	390	952	260	208	76
SDL16-60	607	390	997	260	208	77
SDL16-70	652	390	1042	260	208	84
SDL16-80	697	390	1087	260	208	86
SDL16-100	787	390	1177	260	208	106
SDL16-120	965	500	1465	330	255	161
SDL16-140	1055	500	1555	330	255	174
SDL16-160	1145	500	1645	330	255	178

Performance table


Model	Associated motor(kW)	Q (m³/h)	8	10	12	14	16	18	20	22
SDL16-20	2.2	H (m)	27	26	25	24	22	21	19	16
SDL16-30	3.0		41	40	38	37	34	32	29	25
SDL16-40	4.0		54	53	52	49	46	43	38	34
SDL16-50	5.5		68	67	65	62	58	54	48	43
SDL16-60	5.5		82	80	78	74	70	64	58	52
SDL16-70	7.5		96	95	91	87	82	76	68	61
SDL16-80	7.5		110	108	104	99	94	86	77	70
SDL16-100	11		138	136	131	125	118	109	97	87
SDL16-120	11		166	162	157	150	141	130	116	105
SDL16-140	15		194	190	184	175	166	152	136	122
SDL16-160	15		222	217	210	200	189	174	156	140

Size and appearance of Single phase motors, explosion-proof motor are different, please contact our company.

Performance Curves

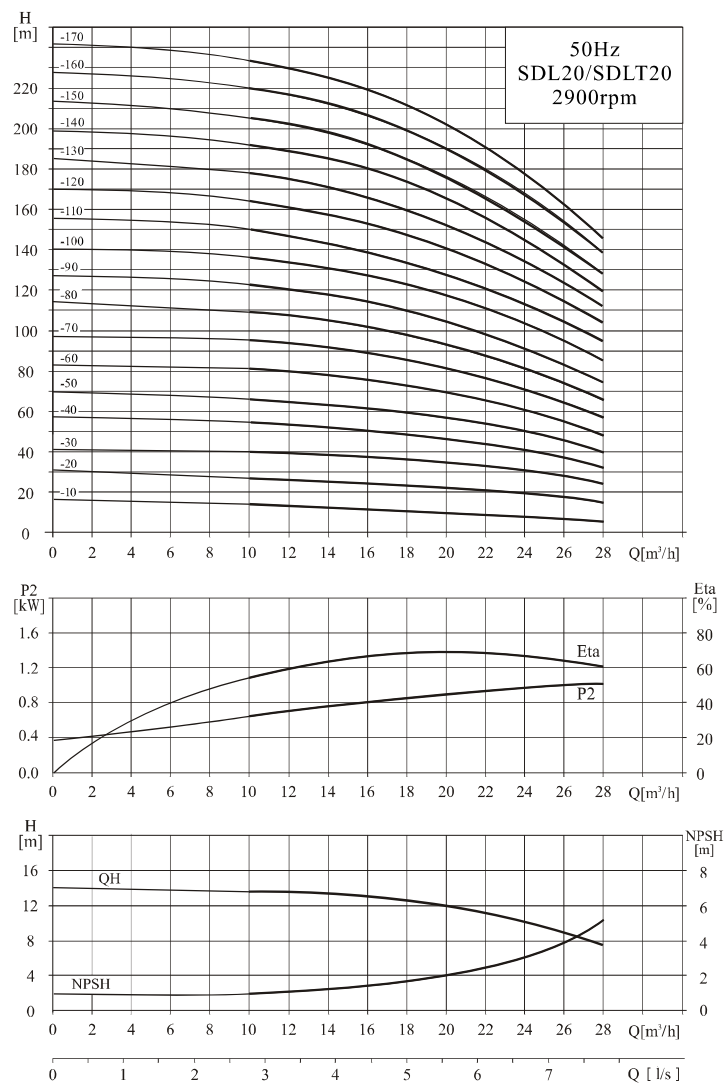

Installation drawing

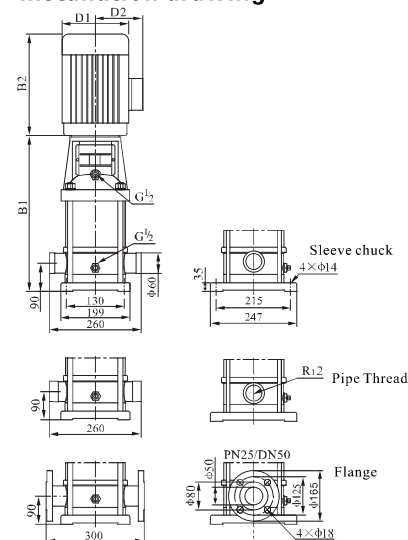

Size & Weight


Model	Size (mm)					Weight(kg)
	B1	B2	B1+B2	D1	D2	
SDL20-10	387	245	632	170	142	33
SDL20-20	397	290	687	190	155	42
SDL20-30	452	355	807	230	188	58
SDL20-40	517	390	907	260	208	74
SDL20-50	562	390	952	260	208	76
SDL20-60	607	390	997	260	208	82
SDL20-70	652	390	1042	260	208	84
SDL20-80	697	390	1087	260	208	101
SDL20-100	875	500	1375	330	255	157
SDL20-120	965	500	1465	330	255	170
SDL20-140	1055	500	1555	330	255	172
SDL20-170	1190	550	1740	330	255	195

Performance table


Model	Associated motor(kW)	Q (m³/h)	10	12	14	16	18	20	22	24	26	28
SDL20-10	1.1	H (m)	13.5	13	12.5	12	11	10	9	8	7	6
SDL20-20	2.2		27	26.5	26	25	24	23	22	20	18	15
SDL20-30	4.0		40	39.5	39	38	37	35	33	30	27	24
SDL20-40	5.5		54	53	52	51	49	47	44	41	37	33
SDL20-50	5.5		67	66	64	62	60	58	55	50	45	40
SDL20-60	7.5		81	79	77	75	73	70	66	61	55	49
SDL20-70	7.5		95	93	91	89	86	82	77	71	65	58
SDL20-80	11		109	107	105	102	99	94	89	82	75	67
SDL20-100	11		136	134	131	128	124	118	111	103	95	85
SDL20-120	15		164	162	158	154	149	142	133	124	114	102
SDL20-140	15		192	189	185	180	174	166	156	145	133	119
SDL20-170	18.5		234	230	225	219	212	202	190	177	162	145

Size and appearance of Single phase motors, explosion-proof motor are different, please contact our company.

Performance Curves

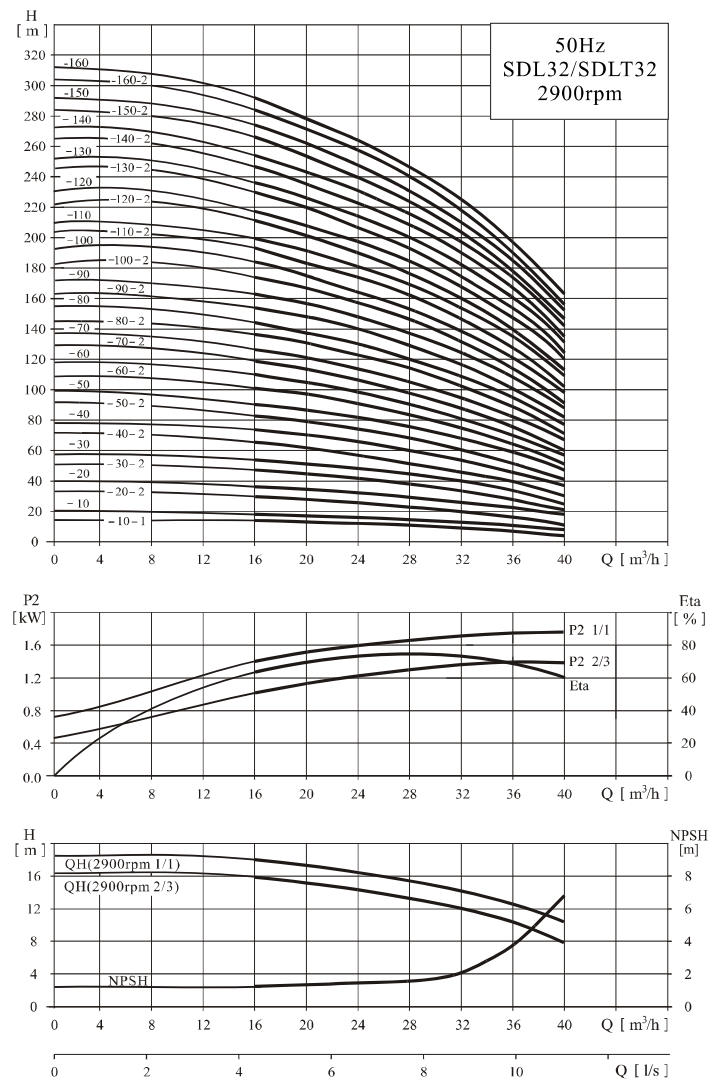

Installation drawing

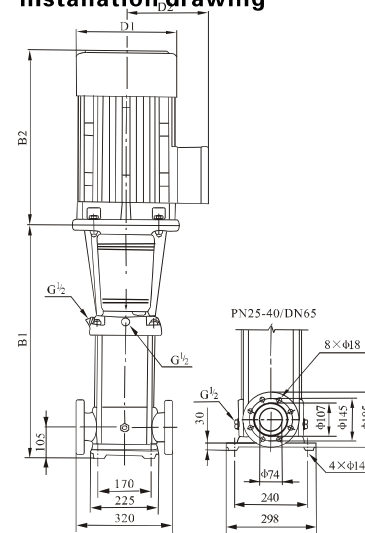

Size & Weight




Model	Size (mm)					Weight(kg)
	B1	B2	B1+B2	D1	D2	
SDL32-10-1/SDL32-10	505	290	795	190	155	64/68
SDL32-20-2/SDL32-20	575	345/355	920/930	197/230	165/180	77/85
SDL32-30-2/SDL32-30	645	390	1035	260	208	100
SDL32-40-2/SDL32-40	715	390	1105	260	208	109
SDL32-50-2/SDL32-50	785	390	1175	260	208	125
SDL32-60-2/SDL32-60	960	500	1460	330	255	185
SDL32-70-2/SDL32-70	1030	500	1530	330	255	199
SDL32-80-2/SDL32-80	1100	500	1600	330	255	203
SDL32-90-2/SDL32-90	1170	550	1720	330	255	222
SDL32-100-2/SDL32-100	1240	550	1790	330	255	227
SDL32-110-2/SDL32-110	1310	575	1885	360	285	272
SDL32-120-2/SDL32-120	1380	575	1955	360	285	276
SDL32-130-2/SDL32-130	1450	575	2025	360	285	293
SDL32-140-2/SDL32-140	1520	575/650	2095/2170	360/400	285/310	298/341
SDL32-150-2/SDL32-150	1590	650	2240	400	310	345
SDL32-160-2/SDL32-160	1660	650	2310	400	310	350

Performance table


Model	Associated motor(kW)	Q (m³/h)	16	20	24	28	32	36	40
SDL32-10-1	1.5	H (m)	14	13	12	11	9	7	4
SDL32-10	2.2		18	17	15	14	13	11	8
SDL32-20-2	3.0		29	28	26	23	20	16	11
SDL32-20	4.0		36	34	32	29	27	23	18
SDL32-30-2	5.5		47	44	41	38	33	28	21
SDL32-30	5.5		54	51	48	44	40	35	27
SDL32-40-2	7.5		65	62	58	53	46	40	30
SDL32-40	7.5		72	69	65	59	53	47	37
SDL32-50-2	11		83	79	74	68	60	52	41
SDL32-50	11		90	86	81	74	67	59	47
SDL32-60-2	11		101	97	90	83	74	65	51
SDL32-60	11		108	104	97	90	81	72	57
SDL32-70-2	15		119	114	107	98	88	78	60
SDL32-70	15		126	121	113	105	95	85	67
SDL32-80-2	15		136	131	123	114	102	90	71
SDL32-80	15		144	138	130	120	109	97	77
Model	Associated motor(kW)	Q (m³/h)	16	20	24	28	32	36	40
SDL32-90-2	18.5	H (m)	154	148	140	129	117	102	82
SDL32-90	18.5		162	156	147	136	124	109	88
SDL32-100-2	18.5		175	166	157	146	131	115	91
SDL32-100	18.5		182	173	164	152	138	122	98
SDL32-110-2	22		193	184	173	164	146	128	102
SDL32-110	22		200	191	180	168	153	135	109
SDL32-120-2	22		211	201	189	178	160	140	113
SDL32-120	22		218	208	196	184	167	147	120
SDL32-130-2	26		230	218	206	193	174	153	124
SDL32-130	26		237	225	213	200	181	160	131
SDL32-140-2	26		247	235	222	210	189	165	135
SDL32-140	30		255	242	229	216	196	172	142
SDL32-150-2	30		266	253	239	224	203	178	145
SDL32-150	30		274	260	246	231	210	185	152
SDL32-160-2	30		284	270	255	240	218	190	156
SDL32-160	30		292	277	262	246	225	197	163

Size and appearance of Single phase motors, explosion-proof motor are different, please contact our company.

Performance Curves

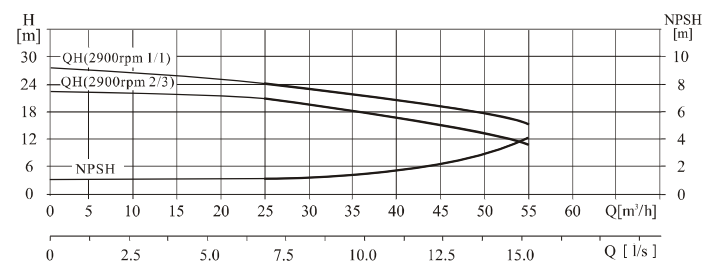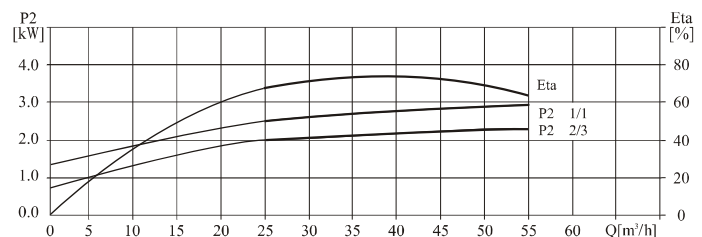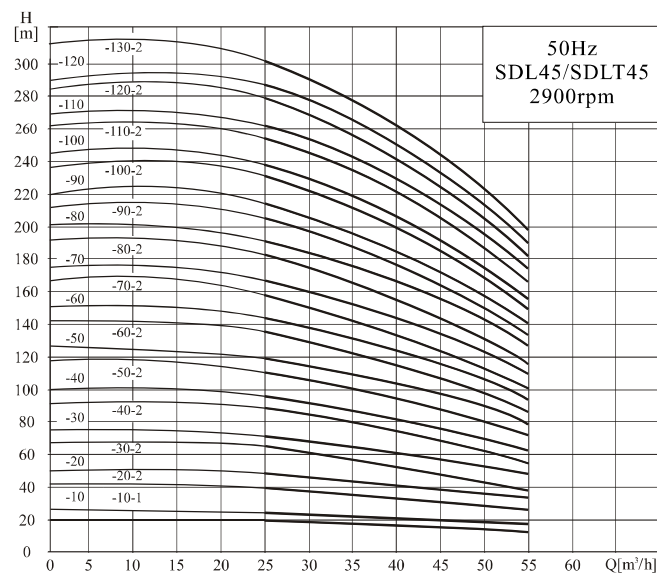

Installation drawing

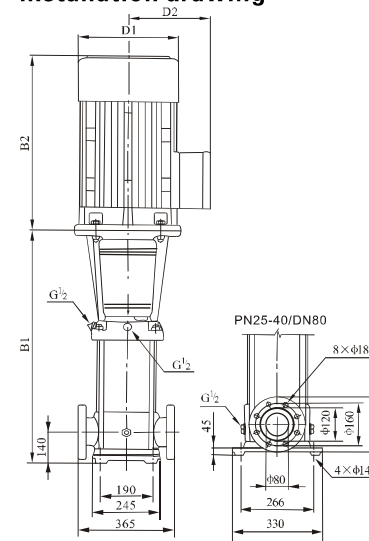

Size & Weight


Model	Size (mm)					Weight(kg)
	B1	B2	B1+B2	D1	D2	
SDL45-10-1	561	345/355	906/916	197/230	165/188	83/90
SDL45-10						
SDL45-20-2	641	390	1031	260	208	105/110
SDL45-20						
SDL45-30-2	721/826	390/500	1111/1326	260/330	208/255	127/183
SDL45-30						
SDL45-40-2	906	500	1406	330	255	197
SDL45-40						
SDL45-50-2	986	550	1536	330	255	221
SDL45-50						
SDL45-60-2	1066	575	1641	360	285	261
SDL45-60						
SDL45-70-2	1146	575	1721	360	285	288
SDL45-70						
SDL45-80-2	1226	650	1876	400	310	324
SDL45-80						
SDL45-90-2	1306	650	1956	400	310	328/352
SDL45-90						
SDL45-100-2	1386	650	2036	400	310	355
SDL45-100						
SDL45-110-2	1466	685	2151	450	345	426
SDL45-110						
SDL45-120-2	1546	685	2231	450	345	432
SDL45-120						
SDL45-130-2	1626	685	2311	450	345	438

Performance table


Model	Associated motor(kW)	Q (m³/h)	25	30	35	40	45	50	55
SDL45-10-1	3.0	H (m)	20	19	18	17	15	13	11
SDL45-10	4.0		24	23	22	21	19	18	16
SDL45-20-2	5.5		40	38	36	33	30	27	23
SDL45-20	7.5		48	46	44	42	39	35	31
SDL45-30-2	11		63	61	58	54	50	44	38
SDL45-30	11		71	69	66	63	58	53	47
SDL45-40-2	15		87	84	80	75	69	62	54
SDL45-40	15		95	92	88	84	78	71	62
SDL45-50-2	18.5		111	107	102	96	88	80	69
SDL45-50	18.5		119	115	110	105	97	88	78
SDL45-60-2	22		135	130	124	117	108	97	85
SDL45-60	22		143	138	132	125	116	106	93
SDL45-70-2	30		158	152	146	138	127	115	100
SDL45-70	30		166	161	154	146	135	124	109
SDL45-80-2	30		182	175	168	159	146	133	116
SDL45-80	30		190	184	176	167	154	141	124
SDL45-90-2	30		205	198	190	180	166	150	132
SDL45-90	37		214	207	198	188	174	159	140
SDL45-100-2	37		230	221	212	200	185	168	147
SDL45-100	37		238	230	220	209	193	177	155
SDL45-110-2	45		255	246	236	223	206	188	165
SDL45-110	45		263	255	244	232	214	196	173
SDL45-120-2	45		280	270	259	245	226	206	181
SDL45-120	45		289	280	268	255	236	216	190
SDL45-130-2	45		305	294	282	267	247	225	198

Size and appearance of Single phase motors, explosion-proof motor are different, please contact our company.

Performance Curves

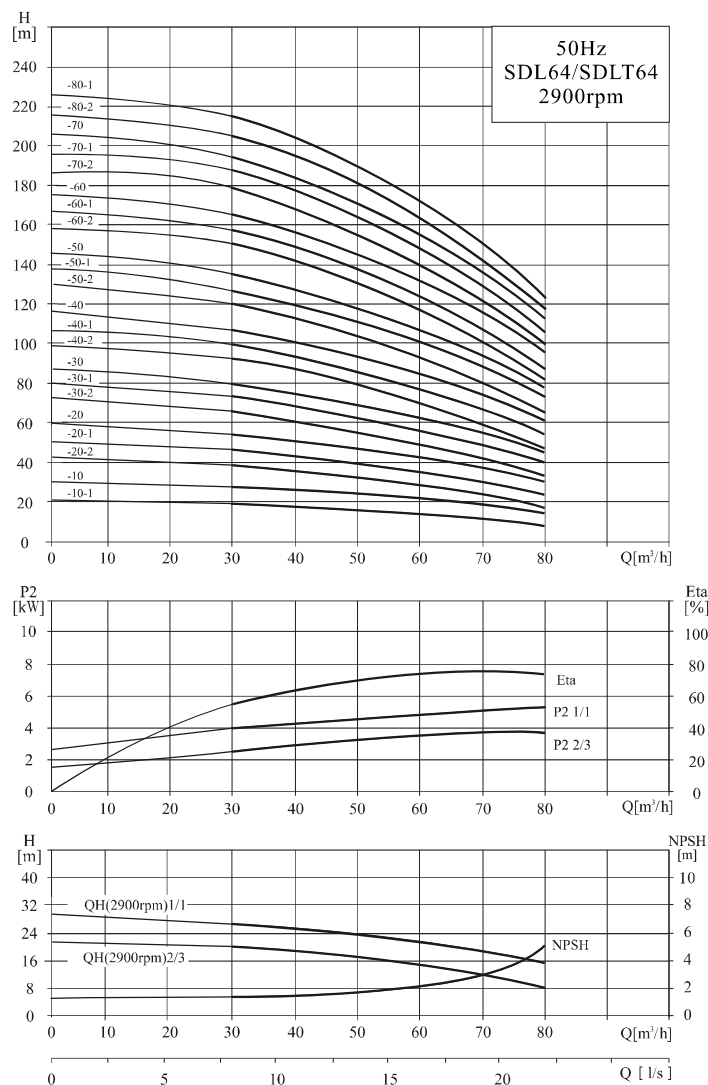

Installation drawing

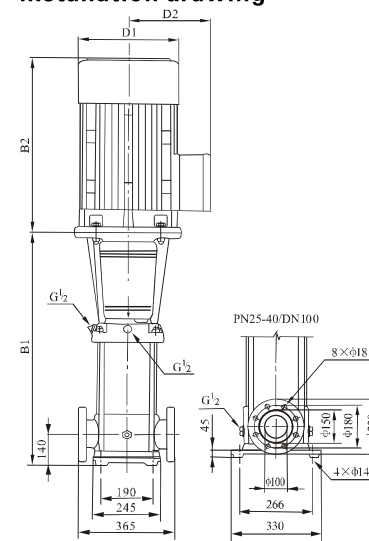

Size & Weight




Model	Size (mm)					Weight(kg)
	B1	B2	B1+B2	D1	D2	
SDL64-10-1	561	355	916	230	188	93
SDL64-10	561	390	951	260	208	105
SDL64-20-2	644	390	1034	260	208	110
SDL64-20-1	754	500	1254	330	255	182
SDL64-20	754	500	1254	330	255	182
SDL64-30-2	836	500	1336	330	255	196
SDL64-30-1	836	500	1336	330	255	197
SDL64-30	836	550	1386	330	255	221
SDL64-40-2	919	550	1469	330	255	225
SDL64-40-1	919	575	1494	360	285	258
SDL64-40	919	575	1494	360	285	258
SDL64-50-2	1001	575	1576	360	285	276
SDL64-50-1	1001	575	1576	360	285	276
SDL64-50	1001	650	1651	400	310	320
SDL64-60-2	1084	650	1734	400	310	325
SDL64-60-1	1084	650	1734	400	310	349
SDL64-60	1084	650	1734	400	310	349
SDL64-70-2	1166	650	1816	400	310	353
SDL64-70-1	1166	650	1816	400	310	353
SDL64-70	1166	685	1851	460	340	420
SDL64-80-2	1248	685	1933	460	340	424
SDL64-80-1	1248	685	1933	460	340	424

Performance table


Model	Associated motor(kW)	Q (m³/h)	30	40	50	60	64	70	80
SDL64-10-1	4.0	H (m)	19	18	16	14	13	11	8
SDL64-10	5.5		27	25	23	21	20	18	15
SDL64-20-2	7.5		39	36	33	29	27	23	17
SDL64-20-1	11		46	44	40	36	34	30	24
SDL64-20	11		53	51	47	43	41	37	30
SDL64-30-2	15		66	62	56	50	47	41	32
SDL64-30-1	15		73	69	63	57	54	48	39
SDL64-30	18.5		80	76	70	64	61	55	46
SDL64-40-2	18.5		92	87	80	71	67	60	47
SDL64-40-1	22		100	94	87	78	74	67	54
SDL64-40	22		107	101	94	85	81	74	61
SDL64-50-2	30		121	114	105	95	89	80	64
SDL64-50-1	30		128	121	112	102	96	87	71
SDL64-50	30		136	129	119	109	103	94	78
SDL64-60-2	30		150	142	131	118	111	101	81
SDL64-60-1	37		157	149	138	125	118	108	88
SDL64-60	37		164	156	145	132	125	115	95
SDL64-70-2	37		179	169	156	141	133	121	99
SDL64-70-1	37		186	176	163	148	141	128	106
SDL64-70	45		193	183	170	155	148	135	112
SDL64-80-2	45		207	196	182	164	156	142	116
SDL64-80-1	45		215	203	189	171	163	149	123

Size and appearance of Single phase motors, explosion-proof motor are different, please contact our company.

Performance Curves

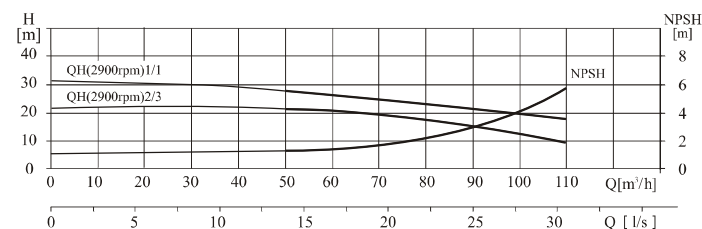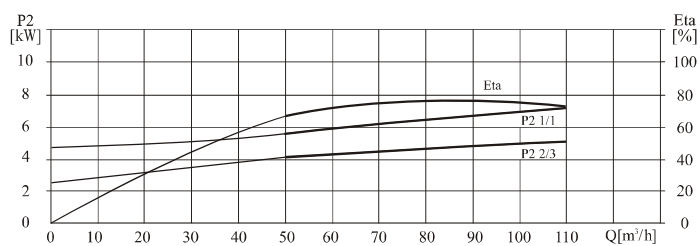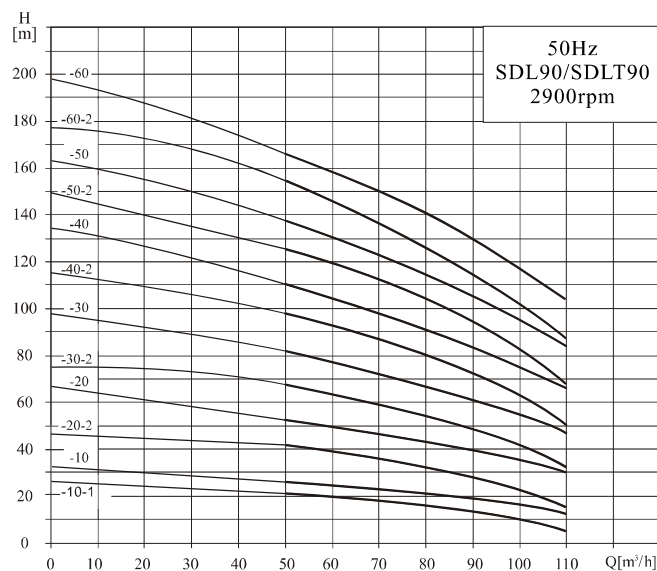

Installation drawing

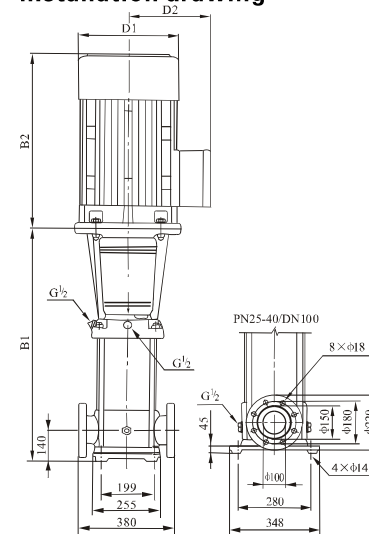

Size & Weight




Model	Size (mm)					Weight(kg)
	B1	B2	B1+B2	D1	D2	
SDL90-10-1	571	390	961	260	208	105
SDL90-10	571	390	961	260	208	110
SDL90-20-2	773	500	1273	330	255	181
SDL90-20	773	500	1273	330	255	192
SDL90-30-2	865	550	1415	330	255	215
SDL90-30	865	575	1440	360	285	252
SDL90-40-2	957	575	1532	360	285	271
SDL90-40	957	650	1607	400	310	312
SDL90-50-2	1049	650	1699	400	310	336
SDL90-50	1049	650	1699	400	310	336
SDL90-60-2	1141	685	1826	460	340	407
SDL90-60	1141	685	1826	460	340	407

Performance table


Model	Associated motor(kW)	Q (m³/h)	50	60	70	80	90	100	110
SDL90-10-1	5.5	H (m)	22	19	17	16	13	10	6
SDL90-10	7.5		25	24	22	21	19	16	12
SDL90-20-2	11		41	39	36	32	28	22	15
SDL90-20	15		53	50	47	44	40	36	30
SDL90-30-2	18.5		68	65	60	55	49	41	32
SDL90-30	22		81	77	72	67	62	55	48
SDL90-40-2	30		98	93	87	80	72	62	50
SDL90-40	30		110	105	100	92	84	76	66
SDL90-50-2	37		126	120	113	104	93	81	68
SDL90-50	37		139	131	124	115	106	94	83
SDL90-60-2	45		155	148	139	129	117	102	86
SDL90-60	45		168	160	150	141	130	117	103

Size and appearance of Single phase motors, explosion-proof motor are different, please contact our company.

Performance Curves

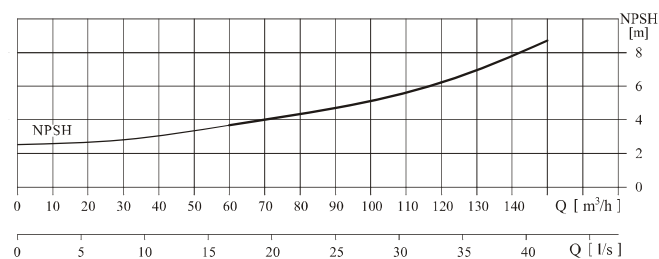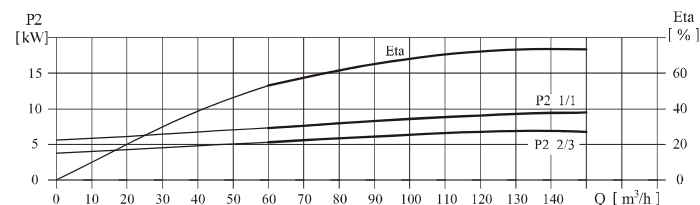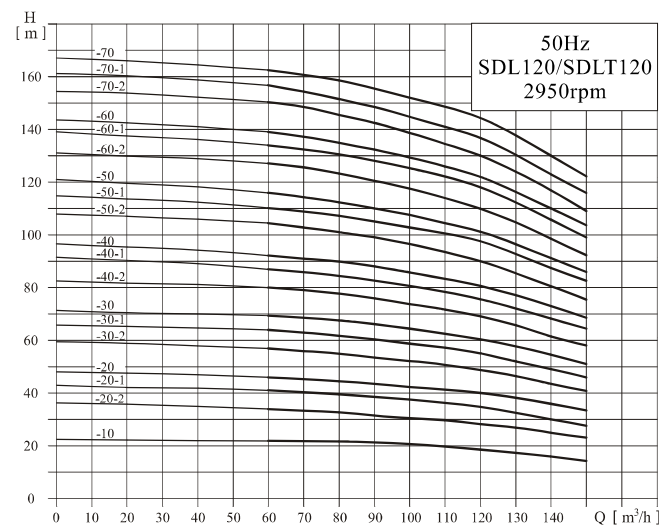

Installation drawing

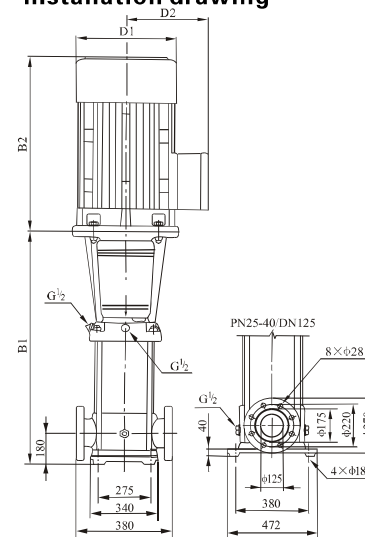

Size & Weight




Model	Size (mm)					Weight(kg)
	B1	B2	B1+B2	D1	D2	
SDL120-10	840	500	1340	330	255	230
SDL120-20-2	1000	500	1500	330	255	245
SDL120-20-1	1000	550	1550	330	255	250
SDL120-20	1000	575	1575	360	285	285
SDL120-30-2	1160	575	1735	360	285	326
SDL120-30-1	1160	650	1810	400	310	360
SDL120-30	1160	650	1810	400	310	360
SDL120-40-2	1320	650	1970	400	310	400
SDL120-40-1	1320	650	1970	400	310	400
SDL120-40	1320	685	2005	460	340	460
SDL120-50-2	1480	685	2165	460	340	470
SDL120-50-1	1480	685	2165	460	340	470
SDL120-50	1510	760	2270	540	370	575
SDL120-60-2	1670	760	2430	540	370	585
SDL120-60-1	1670	760	2430	540	370	585
SDL120-60	1830	845	2515	580	410	705
SDL120-70-2	1830	845	2675	580	410	715
SDL120-70-1	1830	845	2675	580	410	715
SDL120-70	1830	845	2675	580	410	715

Performance table


Model	Associated motor(kW)	Q (m³/h)	60	70	80	90	100	110	120	130	140	150
SDL120-10	11	H (m)	22	21.8	21.6	21	20.5	19.5	18.5	17	16	15
SDL120-20-2	15		34	33.6	33	31	30.2	30	28.5	27	25	24
SDL120-20-1	18.5		41	40	39.5	38.5	37	36.5	34.5	32.5	30	27.5
SDL120-20	22		46	45	44.5	43.5	42.4	41	40	38	36	33.5
SDL120-30-2	30		57	56	55	53.5	52	51	49	46.5	43.5	41
SDL120-30-1	30		64	63	62	60	58.5	57.5	55.5	52	49	46
SDL120-30	30		69.5	68.5	67.5	66	64.4	62.5	61	57.5	54.5	51
SDL120-40-2	37		80.5	79	78	76	73.5	72	69	66	61.5	58
SDL120-40-1	37		87	86	84.5	82	80	78	76	72	68	64.5
SDL120-40	45		92.5	91	90	88	85.5	83	81	77	73	68.5
SDL120-50-2	45		104.5	103	101	99	96	93	90	85.5	80.5	75.5
SDL120-50-1	45		110.5	109	107.5	105	102	100	97	92	86.5	83
SDL120-50	55		115.5	114	113	110	107.5	104.5	101.5	96	91	86
SDL120-60-2	55		128	125.5	123	121	117.3	113.5	110	104.5	98.5	92.5
SDL120-60-1	55		134	132	130.5	127	124	121	118	111	105	100
SDL120-60	75		139	137	135	132	128.8	126	123	116	110	104
SDL120-70-2	75		151	148	145.5	143	138.6	134	130	123.5	116.5	109
SDL120-70-1	75		156.5	154	152	148.5	144.5	141	137.5	130	123	116.5
SDL120-70	75		162.5	160.5	158.5	155	151	148	145	137	129	123

Size and appearance of Single phase motors, explosion-proof motor are different, please contact our company.

Performance Curves

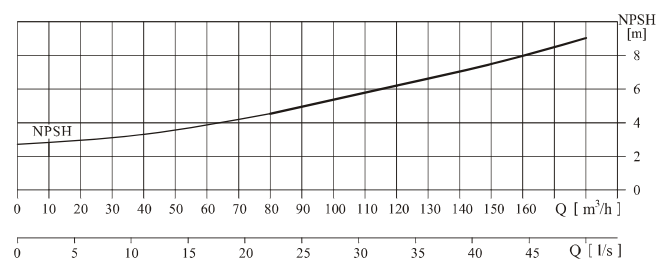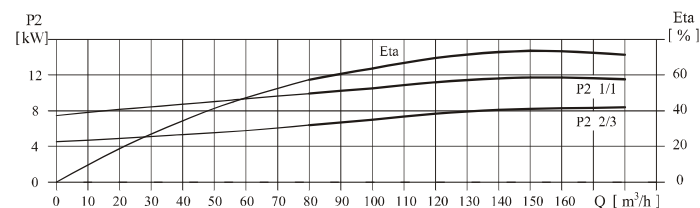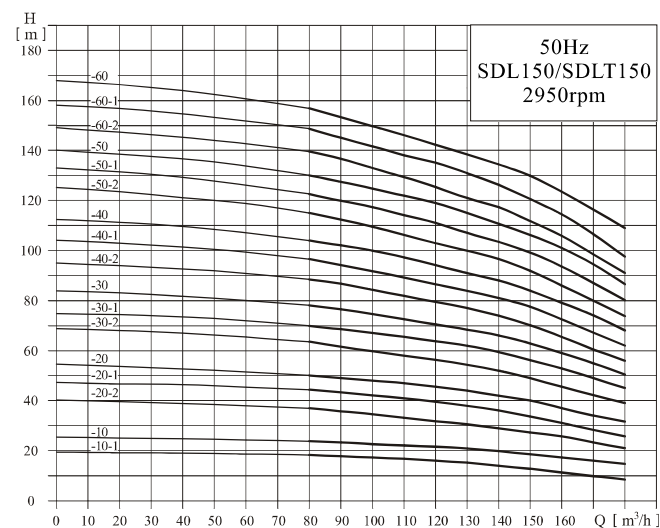

Installation drawing

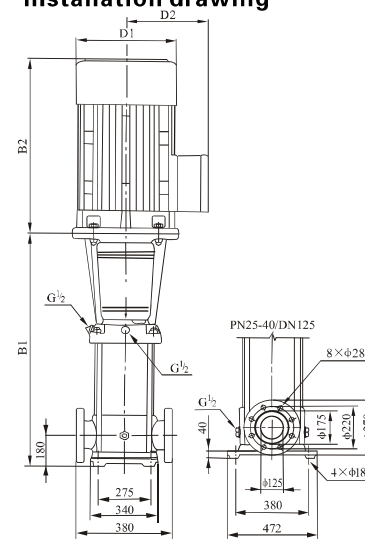

Size & Weight




Model	Size (mm)					Weight(kg)
	B1	B2	B1+B2	D1	D2	
SDL150-10-1	840	500	1340	330	255	230
SDL150-10	840	500	1340	330	255	235
SDL150-20-2	1000	550	1550	330	255	250
SDL150-20-1	1000	575	1575	360	285	295
SDL150-20	1000	575	1575	360	285	317
SDL150-30-2	1160	650	1810	400	310	360
SDL150-30-1	1160	650	1810	400	310	360
SDL150-30	1160	650	1810	400	310	385
SDL150-40-2	1320	685	2005	460	340	460
SDL150-40-1	1320	685	2005	460	340	460
SDL150-40	1350	760	2110	540	370	560
SDL150-50-2	1510	760	2270	540	370	570
SDL150-50-1	1510	845	2355	580	410	690
SDL150-50	1510	845	2355	580	410	690
SDL150-60-2	1670	845	2515	580	410	700
SDL150-60-1	1670	845	2515	580	410	700
SDL150-60	1670	845	2515	580	410	700

Performance table


Model	Associated motor(kW)	Q (m³/h)	80	90	100	110	120	130	140	150	160	170	180
SDL150-10-1	11	H (m)	18.3	17.8	17.3	17	16	15	14	12.5	11	10	8.5
SDL150-10	15		24	23	22.5	22	21.5	20.5	20	18.5	17	16	15
SDL150-20-2	18.5		37	35.5	34	33	32	31	29	27.5	26	23	21
SDL150-20-1	22		44.3	43	42	40	39	38.5	37.5	35	33	30	27
SDL150-20	30		50	49	48	47	45.5	44	42	40	37	34	32
SDL150-30-2	30		63.5	61	59	57.5	56	54.5	53	49	45.5	42	39
SDL150-30-1	37		70	68	67	65	63	62	60	56	53	49	45
SDL150-30	37		78	76.5	75	73	70.5	68	66	63	59	55	50.5
SDL150-40-2	45		89	87	84	81.5	79	77	74.5	70.5	65.5	60	56
SDL150-40-1	45		96.5	94	91.5	89	86.5	84	81.5	77	72.5	67	62
SDL150-40	55		104	102	100	97	95	91	88	84	79.5	74	68
SDL150-50-2	55		115.5	112	109	106	102.5	100	97	92	86	79	73.5
SDL150-50-1	75		122.5	119.5	117	113.5	111.5	107.5	104.5	99	93.5	87	80
SDL150-50	75		130	127.5	125	121	119	115	111.5	106.5	101	94.5	86.5
SDL150-60-2	75		140	137	133	130	126	121	118	112	106	98	91
SDL150-60-1	75		148.5	145	141.7	137.5	135	131	127	120.5	114.5	106.5	97.5
SDL150-60	75		157	153	149	145	142	139.5	137	130	123.5	116	109

Size and appearance of Single phase motors, explosion-proof motor are different, please contact our company.

Performance Curves

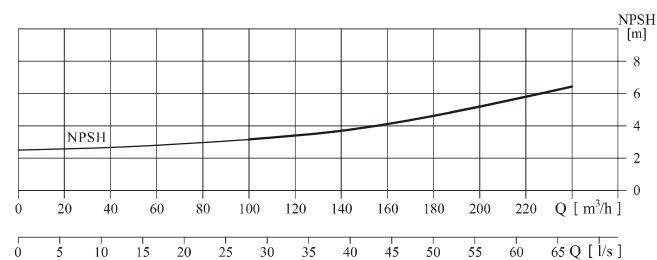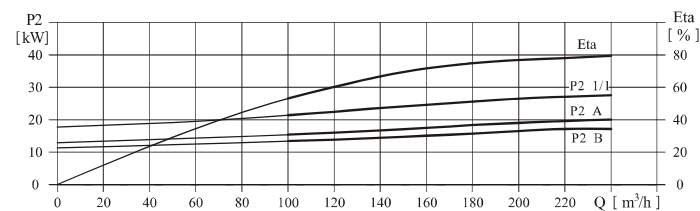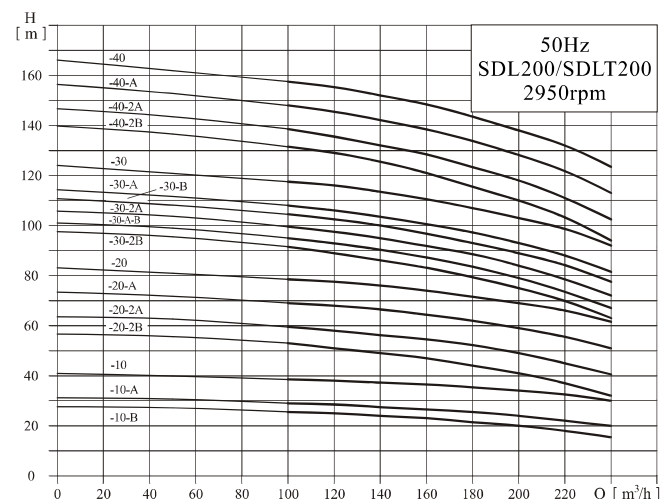

Installation drawing

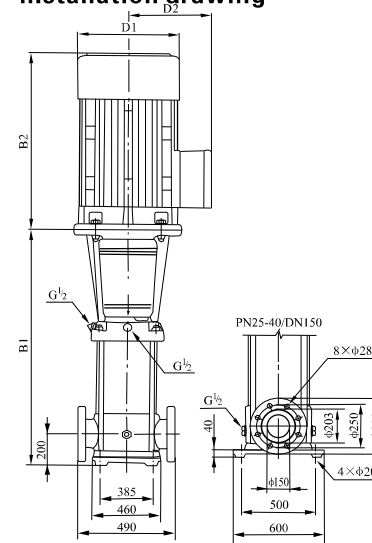

Size & Weight

Model	Size (mm)					Weight(kg)
	B1	B2	B1+B2	D1	D2	
SDL200-10-B	907	550	1457	330	255	311
SDL200-10-A	907	575	1482	360	285	347
SDL200-10	907	650	1557	400	310	403
SDL200-20-2B	1101	650	1751	400	310	447
SDL200-20-2A	1101	685	1786	460	340	504
SDL200-20-A	1131	760	1891	540	370	595
SDL200-20	1131	760	1891	540	370	595
SDL200-30-2B	1325	845	2170	580	410	748
SDL200-30-A-B	1325	845	2170	580	410	748
SDL200-30-2A	1325	845	2170	580	410	748
SDL200-30-B	1325	845	2170	580	410	748
SDL200-30-A	1325	845	2170	580	410	748
SDL200-30	1325	895	2220	580	410	817
SDL200-40-2B	1519	895	2414	580	410	830
SDL200-40-2A	1519	1140	2659	645	550	1180
SDL200-40-A	1519	1140	2659	645	550	1180
SDL200-40	1519	1140	2659	645	550	1180

Performance table

Model	Associated motor(kW)	Q (m³/h)	100	120	140	160	180	200	220	240
SDL200-10-B	18.5	H (m)	25.5	25	24	23	21.5	20	18	15.5
SDL200-10-A	22		29	28.5	27.5	26.5	25.5	24	22	20
SDL200-10	30		38.5	38	37.5	36.5	35	34	32.5	30
SDL200-20-2B	37		53	51	49	47	44	41	37	32
SDL200-20-2A	45		59.5	58	56	54	52.5	49	44.5	40.5
SDL200-20-A	55		69	68	66	64	62	59	55.5	51
SDL200-20	55		78.5	77.5	76	74	71.5	69	66	61.5
SDL200-30-2B	75		91.5	89	86.5	83.5	79	75	70	63
SDL200-30-A-B	75		95	93	90	87	83.5	79	73.5	67
SDL200-30-2A	75		99.5	97.5	94.5	91.5	89	84	78.5	72
SDL200-30-B	75		104.5	102.5	100	97	93	89	84.5	77.5
SDL200-30-A	75		108	106	103.5	100.5	97.5	93	88	81.5
SDL200-30	90		117.5	116	113.5	110.5	107	103	99	92
SDL200-40-2B	90		131.5	129	125.5	121	115.5	110	103.5	94
SDL200-40-2A	110		138.5	136	132	128	124	118	111	102.5
SDL200-40-A	110		148	145.5	142.5	138	134	128	122	113
SDL200-40	110		157.5	155.5	152.5	148	143.5	138	132.5	123.5

Size and appearance of Single phase motors, explosion-proof motor are different, please contact our company.